


WIRING		
MALE		FEMALE
PIN #		PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4

C

A

B

A

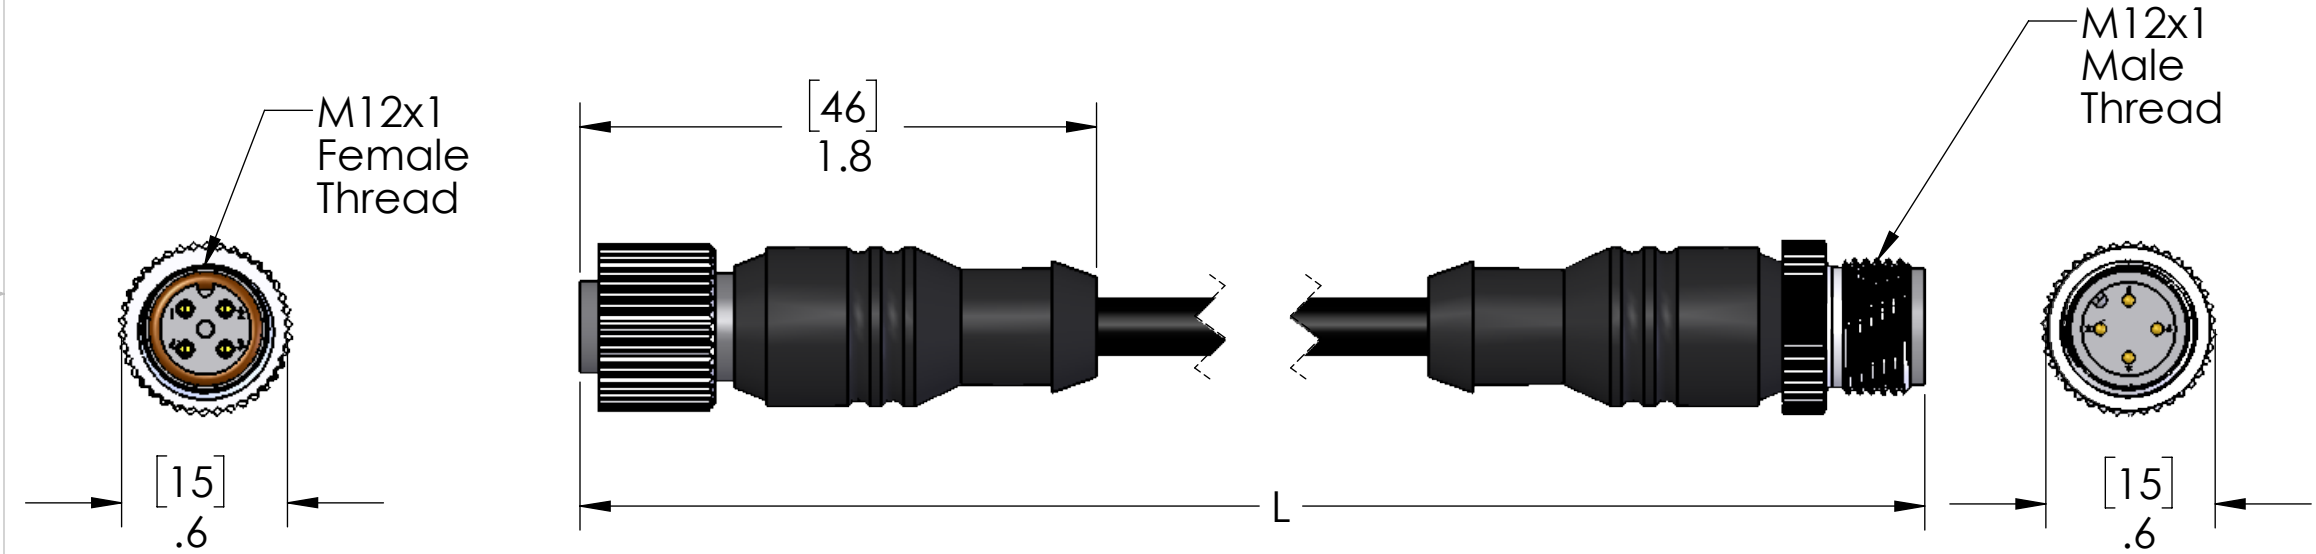

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	22/4 CONTINUOUS FLEX BLACK TPE JACKET. 10MM FLEX RATING, 10MM TORSION RATING, MIN BEND RADIUS IS 10x CABLE O.D.
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM

APPROVALS:	
US	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	03/09/2017
	CHECKED BY	ADM
	CHECK DATE	03/09/2017
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

TABLE A		
P/N	L	STD?
MDCWF-4MFP-0.3M	12" [0.3m]	YES
MDCWF-4MFP-0.5M	19" [0.5m]	YES
MDCWF-4MFP-1M	40" [1m]	YES
MDCWF-4MFP-2M	79" [2m]	YES
MDCWF-4MFP-3M	118" [3m]	YES
MDCWF-4MFP-4M	157" [4m]	YES
MDCWF-4MFP-5M	197" [5m]	YES
MDCWF-4MFP-6M	236" [6m]	NO
MDCWF-4MFP-8M	315" [8m]	NO
MDCWF-4MFP-10M	393" [10m]	YES
MDCWF-4MFP-15M	590" [15m]	YES
MDCWF-4MFP-20M	786" [20m]	YES
MDCWF-4MFP-25M	983" [25m]	NO
MDCWF-4MFP-30M	1179" [30m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MENCOM CORPORATION		
TITLE:		
4 POL M-F EXT, TPE		
SIZE	DWG. NO.	REV
B	MDCWF-4MFP-ZZ	B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1