



MEF EMC-FILTER 3-PHASE 2-STAGE

I:25A U:3x500 VAC book-style

Current: 25 A
2-stage

[Link to Product](#)

Illustration

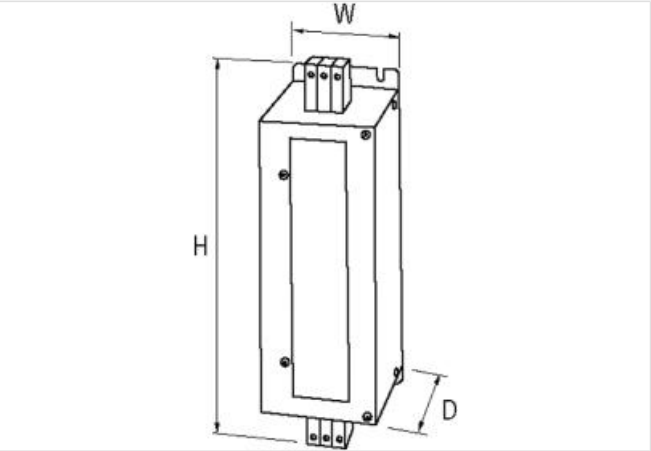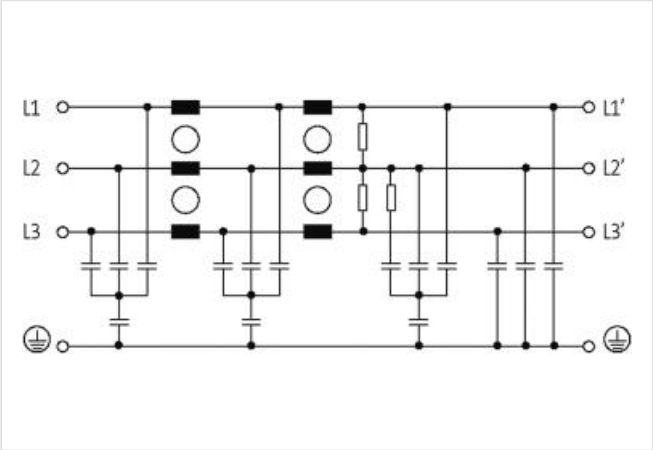

Product may differ from Image



Technical Data	
Operating voltage	max. 3× 500 V AC
Connection cross section	0.2...10 mm² single core (AWG 24...7); 0.2...6 mm² multiple core (AWG 24...9)
Operating frequency	50...60 Hz
Overload current	18× (1N t) max. 0.5 ms; 1.5× (1N t) max. 1 min. (1× per hour)
Consumption	max. 15 mA (250 V AC)
General data	
Mounting method	screw fixing

Test isolation voltage	3.3 kV (L-N), 2 s; 3.1 kV (L-L), 2 s
------------------------	--------------------------------------

Climatic category	25/085/21 (EN 60068-1)
-------------------	------------------------

Connection	Screw connection, touch protected
------------	-----------------------------------

Dimensions H×W×D	226×50×140 mm
------------------	---------------

Description

Functional description	The 3-phase and 1-/2-stage EMC filters MEF 3/1-3/2 are used in the range 0.1...30 MHz and dampen interferences found in cables from the mains, supply units and control systems. They are suitable for TN-C-mains. The best results are obtained with short con
------------------------	---

Product article number of manufacturer	10553
--	-------