



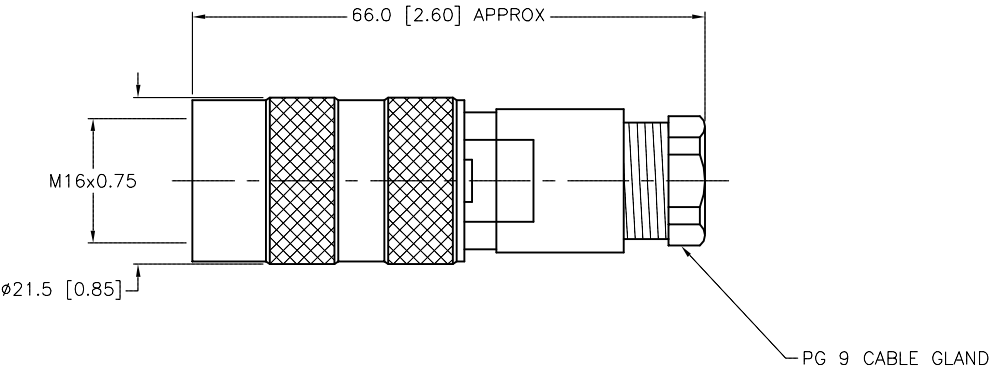
FEMALE END VIEW




 M16 connector

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
HOUSING MATERIAL	NYLON
COUPLING NUT MATERIAL	BRASS
RATED CURRENT [A]	5.0 A
RATED VOLTAGE [V]	60 V AC/DC
TEMPERATURE RANGE	-40°C to +85°C (-10°F to +185°F)
PROTECTION CLASS	MEETS IEC IP67
CABLE GLAND	PG 9 - ACCEPTS 6-8mm CABLE
TERMINATION TYPE	SOLDER CUP



SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div><div>TURCK INC</div><div>High Technology Sensors and Automation Controls</div></div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>				
					1.				DRFT RDS DATE 10/10/12		DESCRIPTION BK 8-0				
					2.										
					3.										
4.		MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.0		IDENTIFICATION NO. U2-02867		REV A			
FINISH		CONTACT TURCK FOR MORE INFORMATION				UNIT OF MEASUREMENT MILLIMETER [ INCH ]		FILE: U2-02867							
A		DRAWING RELEASE		RDS		10/11/12									
REV		DESCRIPTION		BY		DATE		ECO NO.						SHEET 1 OF 1	