


SPECIFICATIONS		
CONTACT CARRIER MATERIAL	NYLON OR TPU	
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
CONTACT MATERIAL/PLATING	BRASS/GOLD	
LOCKING SLEEVE	POM, SNAP LOCK	
RATED CURRENT [A]	4.0 A	
RATED VOLTAGE [V]	125 VAC/VDC	
OUTER JACKET MATERIAL/COLOR	TPU/BLACK	
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS [AWG]	4x26 AWG	
TEMPERATURE RATING	-40°C TO +90°C (-40°F TO +194°F)	
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	

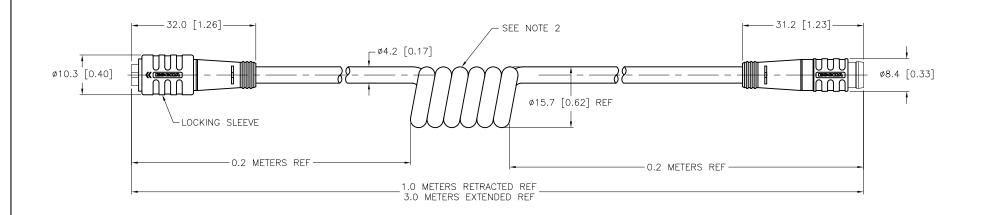

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 3RD ANGLE PROJECTION THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 turck inc 2. (763) 553-7300 DOCUMENT WITHOUT WRITTEN PERMISSION IS NOTES: High Technology Sensors and Automation Controls 3. (763) 553-0708 fax PROHIBITED. turck.com 1. "/S90" DESIGNATES POLYURETHANE (TPU) CABLE. MATERIAL DATE 02/07/07 RWC PKG 3Z-3-PSG 3/S90-SP 2. NUMBER OF COILS IS REFERENCE ONLY. ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR APVD SCALE 1 = 1.0SEE SPECIFICATIONS UNIT OF MEASUREMENT REFERENCE ONLY IDENTIFICATION NO. REV FINISH MILLIMETER [INCH] CONTACT TURCK FOR MORE U0069-09 DRAWING PROCESSED AS PART OF ECO 39300 KMY 07/09/12 39300 SEE SPECIFICATIONS INFORMATION DESCRIPTION DATE ECO NO. DO NOT SCALE THIS DRAWING FILE: U0069-09 SHEET 1 OF 1