


| SPECIFICATIONS | |
|-------------------------------|----------------------------------|
| CONTACT CARRIER MATERIAL | NYLON OR TPU |
| MOLDED HEAD MATERIAL/COLOR | TPU/YELLOW |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| COUPLING NUT MATERIAL/COLOR | POM, SNAP LOCK/BLACK |
| RATED CURRENT [A] | 2.0 A |
| RATED VOLTAGE [V] | 125 VAC/VDC |
| OUTER JACKET MATERIAL/COLOR | TPU/BLACK |
| CONDUCTOR INSULATION MATERIAL | PVC |
| NUMBER OF CONDUCTORS [AWG] | 4x26 AWG |
| TEMPERATURE RANGE | -40°C to +90°C (-40°F to +194°F) |
| PROTECTION CLASS | MEETS NEMA 1,3,4,6P AND IEC IP67 |



SOURCE DRAWING - FOR REFERENCE ONLY

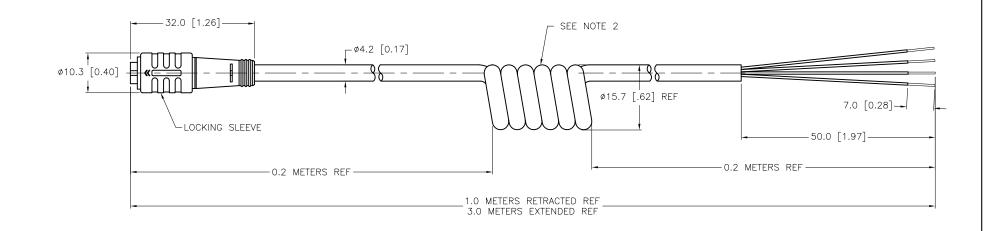