



FEMALE END VIEW





1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK

MALE END VIEW




1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK





SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
LOCKING SLEEVE MATERIAL	POM, SNAP LOCK
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	125 VAC/VDC
OUTER JACKET MATERIAL/COLOR	TPU/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x26 AWG
TEMPERATURE RATING	-40°C TO +90°C (-40°F TO +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

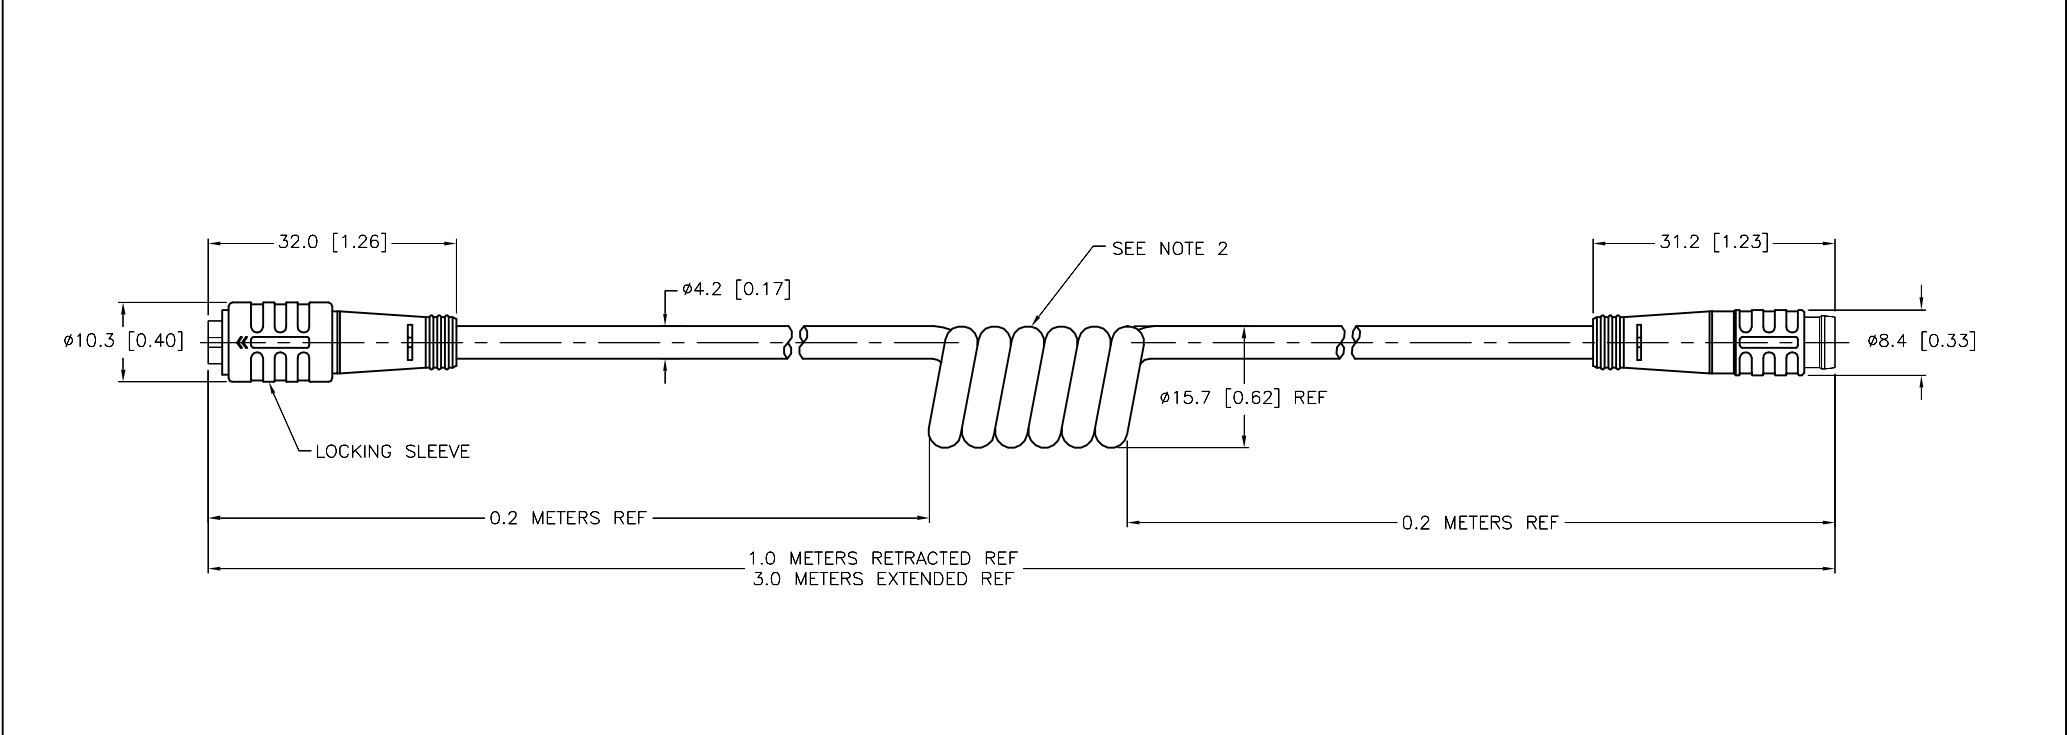

NOTES:


1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.

2. NUMBER OF COILS IS REFERENCE ONLY.

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RWC

APVD

DATE 02/15/07


SCALE 1=1.0

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us



DESCRIPTION

PKG 4Z-3-PSG 4/S90-SP

IDENTIFICATION NO.

U99-10880

REV

E

E	DRAWING PROCESSED AS PART OF ECO 39300	KMY	07/10/12	39300
REV	DESCRIPTION	BY	DATE	ECO NO.