

S3-B


Socket for 11-pin Relays and Time Cubes

|                                  |                                        |
|----------------------------------|----------------------------------------|
| Rated Load                       | 10 A / 300 V                           |
| <b>Specifications</b>            |                                        |
| Rated impulse withstand voltage  | 2.5 kV rms / 1 min                     |
| – All terminals / DIN rail       | 2.5 kV rms / 1 min                     |
| – Terminal / Terminal            |                                        |
| Cross-section of connecting wire |                                        |
| – Single-wire                    | 4 mm² / AWG 12 or 2 x 2.5 mm² / AWG 14 |
| – Multi-wire                     | 0.34 mm² / AWG 22 - 2.5 mm² / AWG 14   |
| Nominal screw torque             | 0.7 Nm                                 |
| Screw dimensions                 | M3 Pozi slot                           |
| Mounting                         | TS-35 or Back Panel Mounting           |
| Ambient temperature              | -40 ....60 °C /-40 ... 80 °C (no ice)  |
| Weight                           | 55g                                    |



|                             |                                                                                |
|-----------------------------|--------------------------------------------------------------------------------|
| <b>Included Accessories</b> |                                                                                |
| Retaining Clip, plastic     | S30-CM for C3 / C3x Relays                                                     |
| <b>Optional Accessories</b> |                                                                                |
| Retaining clip, steel       | HF-32 (BAG 10 PCS) for C3 / C3x Relays<br>HF-33 (BAG 10 PCS) for Time Cube CTx |
| Coding Ring                 | S3-BC (BAG 5 PCS) for C3 / C3x Relays                                          |



Connection diagram

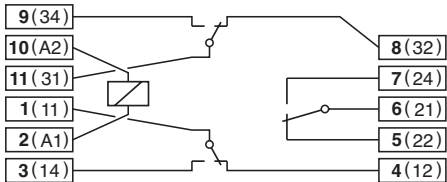

Dimensions [mm]

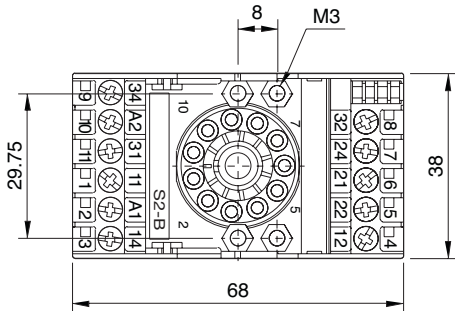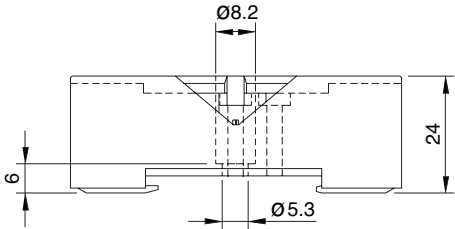

Technical approvals, conformities

