



INTERNAL MARKINGS AS SHOWN



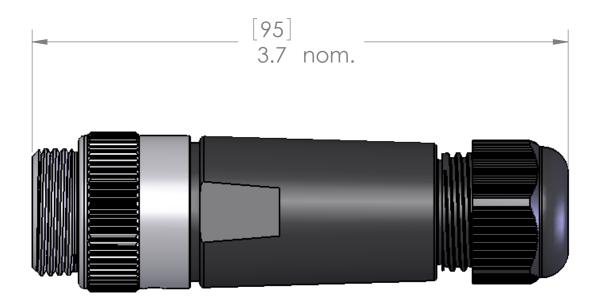

MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	YELLOW PVC
COUPLING:	BLACK ANODIZED ALUMINUM
RATINGS	
KATINGS	
AMPS:	14AWG - 12A max
	16AWG - 8A max
	18AWG - 5.5A max
	20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	14AWG - 22AWG
	0.20" - 0.51" (5mm - 13mm) OD

Maximum voltage is cable dependent. Voltage rating is 600V or the voltage rating on the cable, whichever is less.

Connections made via screw terminal

PROPRIETARY AND CONFIDENTI	AL
THE INFORMATION CONTAINED IN T	HIS
DRAWING IS THE SOLE PROPERTY O	F
MENCOM CORPORATION. ANY	
REPRODUCTION IN PART OR AS A W	VHOLE
WITHOUT THE WRITTEN PERMISSION (OF
MENCOM CORPORATION IS	
PROHIBITED.	

		UNLESS OTHERWISE SPECIFIED:		NAME	MAEN	NCOM CORPOR	ΔTIC	M
	DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM	/V\LI	100M COM ON	<i>/</i> (11C	/ I N	
		CHECKED		TITLE:				
			ENG APPR.					
			MFG APPR.					
			Q.A.					
			COMMENTS:					
		MATERIAL			SIZE DWG			
		FINISH			B MIN-5MP-FW-DN			А
'		DO NOT SCALE DRAWING			SCALE: 3:2	WEIGHT:	SHEET	1 OF