



MIRO TEMP. CONVERTER PT100 - 2 /3-LEAD METHOD

IN: -50°C..+50°C - OUT:0..10 V / (0)4..20 mA

INPUT: -50...+50 °C
Spring clamp terminals

[Link to Product](#)

Illustration

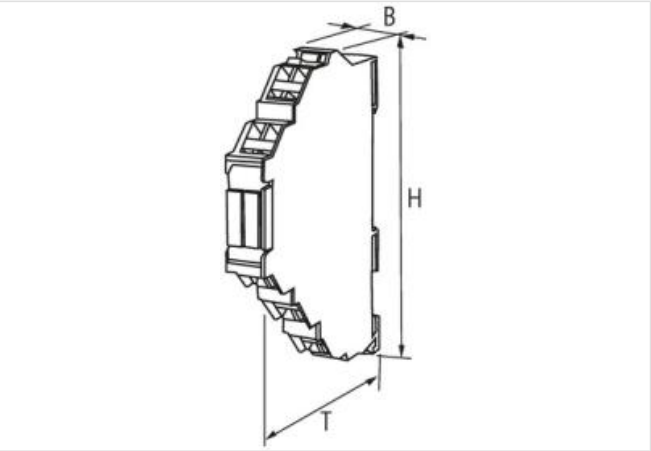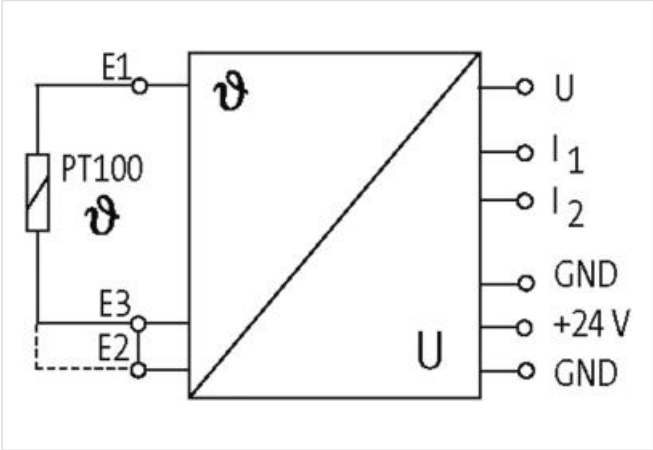

Product may differ from Image

Technical Data	
Operating voltage	24 V DC (18...30 V DC), smoothed
Operating current	max. 80 mA
Output signals at 4...20 V mA	max. 500 Ω RL
Output signals at 0...20 mA	max. 500 Ω RL
Output signals at 0...10 V DC	max. 25 mA, overload protected
Tolerance	±1% from end value
Cable resistance (without Pt100)	max. 100 Ω (3-wire technology)
General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C
Dimensions H×W×D	90×12.4×70 mm

Description

Functional description	The Murrelektronik temperature converter module works in conjunction with a temperature sensor PT100 (IEC 751/EN 60751) and converts the temperature into a standard signal format of (0...10 V, 4...20 mA, 0...20 mA). The MTW modules supply a constant curre
Product article number of manufacturer	6644330