

WIRING


1 - 1

2 - 2

3 - 3

4 - 4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	5/20/2004	

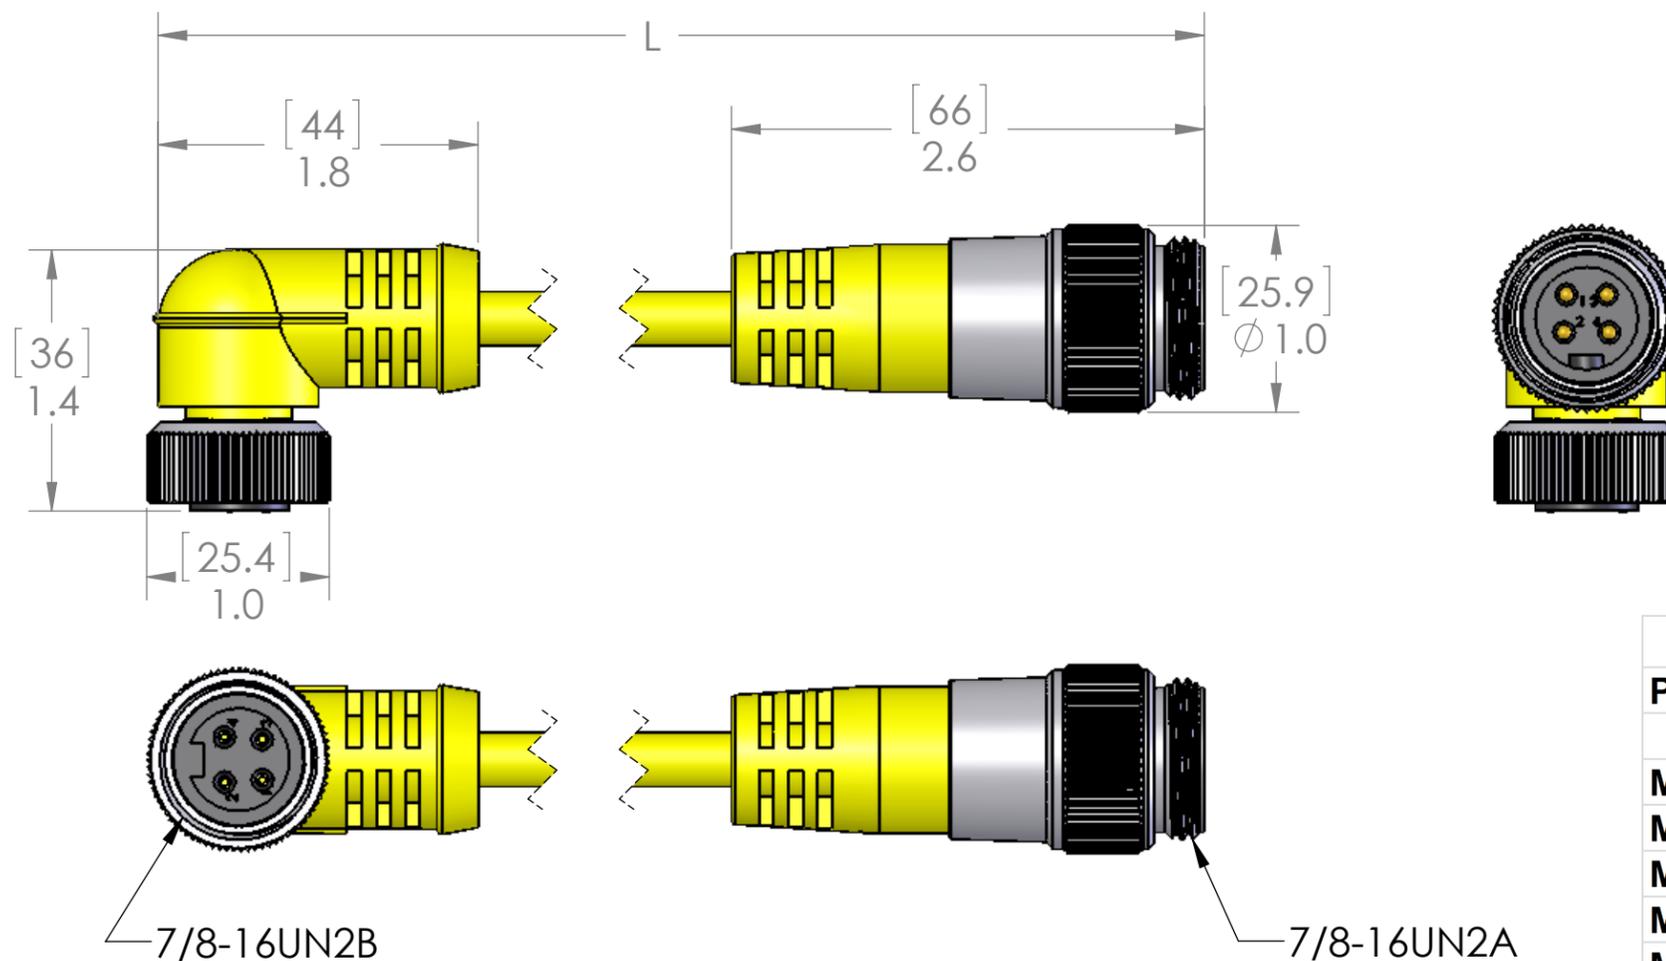

P/N	L
MINC-4MFRPX-1M	40" [1m]
MINC-4MFRPX-2M	79" [2m]
MINC-4MFRPX-3M	118" [3m]
MINC-4MFRPX-4M	157" [4m]
MINC-4MFRPX-5M	197" [5m]
MINC-4MFRPX-6M	236" [6m]
MINC-4MFRPX-8M	315" [8m]
MINC-4MFRPX-10M	393" [10m]
MINC-4MFRPX-15M	590" [15m]

MATERIALS:	
BODY:	YELLOW PVC, 105°C OIL RESISTANT
INSERTS:	BLACK PVC, 105°C OIL RESISTANT
CABLE:	18/4 AWM 2661 105°C OIL RESISTANT
COUPLING:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY

Amperage rating is per NEC when using all 4 wires as current carrying conductors.

APPROVALS:	
US	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	5.5A
TEMP	105°C
SPECIFICATIONS	
DO NOT SCALE DRAWING	

UNLESS OTHERWISE SPECIFIED:	NAME
DIMENSIONS ARE IN INCHES AND [MM]	BEM
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MINC-4MFRPX-ZZ	A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1