

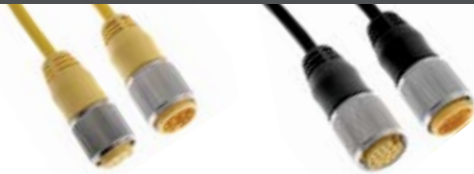






1 1/8" MIN Series Size III Cordsets

12 & 19 Conductor MIN Series Size III Cordsets, 16/18/22AWG



Double Ended Cordsets | 600V, 5A | 300V, 6/1A or 4/2A | IP67 Rating



Male Faceview	Part Number	Cables	Features	Color Code	Female Faceview
 1 1/8"-16UN2	MIN-12MFP-*-C011	Black PVC AWM 12 X 16 AWG 600V, 5A -40°C to +105°C 14mm OD	PVC TC-ER	North American 1. Orange 2. Blue 3. White/Black 4. Red/Black 5. Green/Black 6. Orange/Black 7. Blue/Black 8. Black/White 9. Green/Yellow 10. Red 11. White 12. Black	 1 1/8"-16UN2
	MIN-12MFPX-*	Yellow PVC AWM 12 X 18 AWG 300V, 4A -40°C to +105°C 10.5mm OD	Industry Standard PVC		
	MINP-12MFPX-*	Yellow PUR AWM 12 X 18 AWG 300V, 4A -40°C to +80°C 10.5mm OD	Oil and Cutting Fluid Resistant Cut Resistant PUR		
 1 1/8"-16UN2	MINP-19MFP-**	Black PUR AWM With Foil Shield 3 X 18 AWG 300V, 6A : 4A 16 x 22 AWG 300V, 1A : 2A -40°C to +80°C 11mm OD	Oil and Cutting Fluid Resistant Cut Resistant PUR Foil Shield	North American 1. Violet 2. Red 3. Gray 4. Red/Blue 5. Blue*** 6. Green 7. Brown*** 8. White/Green 9. White/Yellow 10. White/Gray 11. Black 12. Green/Yellow*** 13. Yellow/Brown 14. Brown/Green 15. White 16. Yellow 17. Pink 18. Gray/Brown 19. Gray/Pink	 1 1/8"-16UN2

MIN Series Size III Cordsets

** Lengths in meters. Standard cable lengths are 1, 2, 4, 5, 6, 10 & 15 meters. Consult factory for other lengths.

*** Blue, Brown and Green/Yellow are 18 AWG wires.


Standard coupling nut is nickel plated brass, for stainless steel coupling nut add a "-SS" suffix. (e.g. MINP-19MFP-1M becomes MINP-19MFP-1M-SS)

For male threaded coupling nut replace "MFP" with "MFPM". (e.g. MIN-19MFP-1M becomes MIN-19MFPM-1M)

For available options for extension cables with right angle male and/or female ends, please consult the factory.



TC-ER Male - Female Extension
19 Pole Male - Female Extension



AWM Male - Female Extension