

CZ - CZA and MZA IL-BRID standard version

inserts

CD	25 poles + ⊕
CDD	38 poles + ⊕
CDA	16 poles + ⊕
CSAH	16 poles + ⊕
CDC	16 poles + ⊕

page:

69
77
100
101
105

bulkhead mounting housings with single lever




surface mounting housings with single lever




description	part No.	part No.	entry Pg	part No.	entry M
with single lever	CZI 25 L				
with single lever and cover	CZI 25 LS				
with single lever, high construction		CZAP 25 L	16		
with single lever, high construction		CZAP 25 L2	16 x 2		
with single lever, high construction		CZAP 25 L21	21	MZAP 25 L25	25
with single lever, high construction		CZAP 25 L221	21 x 2	MZAP 25 L225	25 x 2
with single lever and cover, high construction		CZAP 25 LS	16		
with single lever and cover, high construction		CZAP 25 LS2	16 x 2		
with single lever and cover, high construction		CZAP 25 LS21	21	MZAP 25 LS25	25
with single lever and cover, high construction		CZAP 25LS221	21 x 2	MZAP 25LS225	25 x 2

☑ The enclosures ensure IP66/IP69 degree of protection (or IP65 for hinged cover versions) when mated and locked with the closing levers.


panel cut-out for bulkhead mounting housings

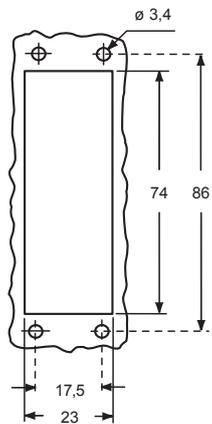


CZI L ▲

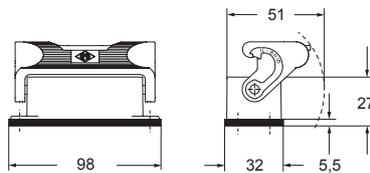


CZI LS ●

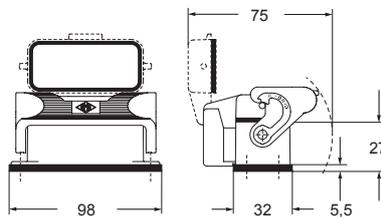

CZAP L and MZAP L ▲

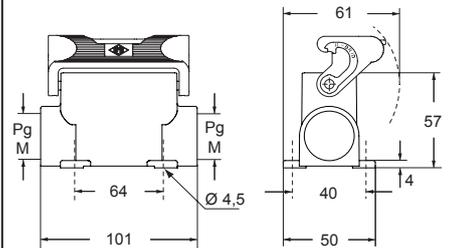

CZAP LS and MZAP LS ●

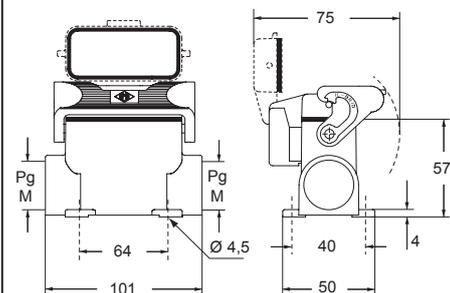

CALUS Type 4/4X/12



● insulating cable gland or fittings
▲ without gasket



▲ cable gland with O-Ring gasket