


	WIRING	
MALE		FEMALE
1	-----	1
2	-----	2
3	-----	3
4	-----	4

D

C

B

A

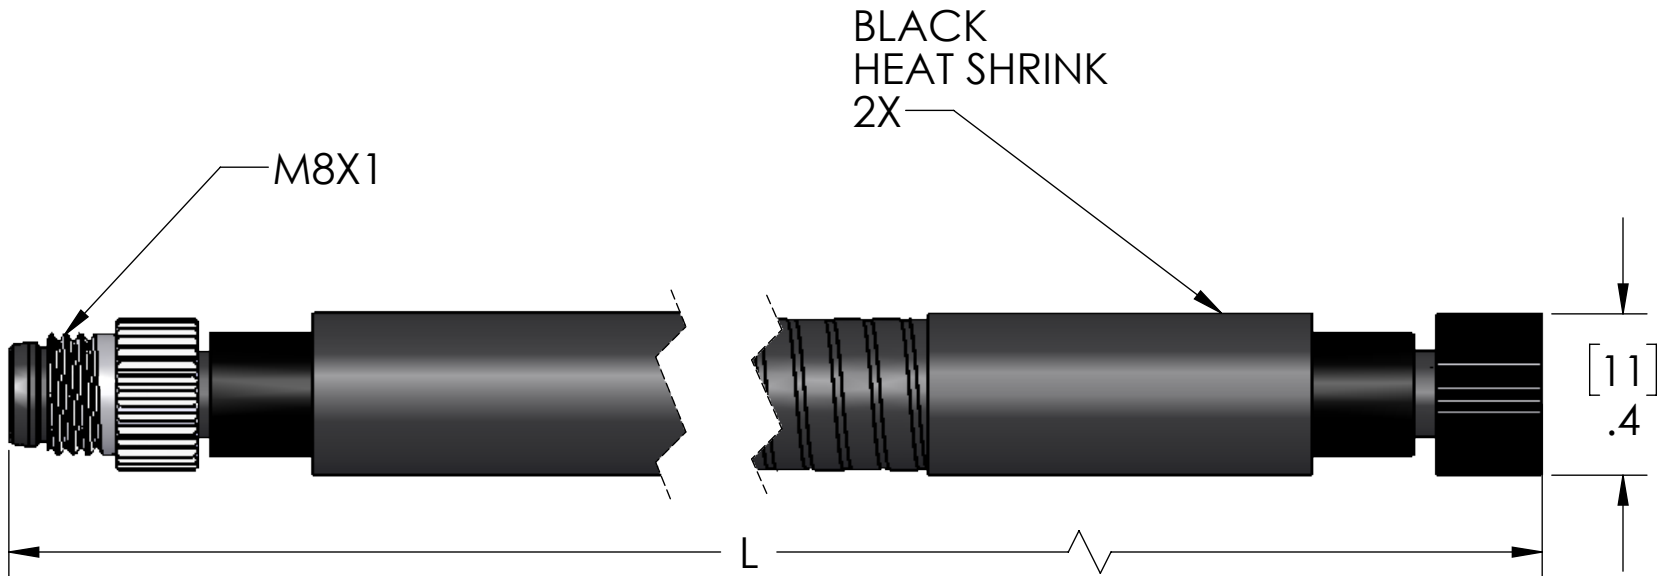

NOTE: ARMOR WILL BE WITHIN [38] 1.5" OF THE END OF THE OVERMOLD.
HEAT SHRINK WILL HOLD ARMOR IN PLACE.

MATERIALS:	
BODIES:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	24/4 BLACK PVC JACKET
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	NBR
ARMOR:	0.39" OD SS FLEX TUBE, BLK PVC JACKET
HEAT SHRINK:	POLYELFIN

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	60V
AMPS	3A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	JJH
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	02/20/2017
	CHECKED BY	ADM
	CHECK DATE	02/20/2017
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 4 PL ARMRD NAN M-F EXT CBL		
SIZE B	DWG. NO. NAN-T-4MFP-ZZ-A03	REV A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

D

C

B

A