

PIN #	COLOR
1	N/C
2	GREEN
3	N/C
4	RED
5	SHIELD


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
X	PRELIM	2/23/12	DCT

D

C


B

A

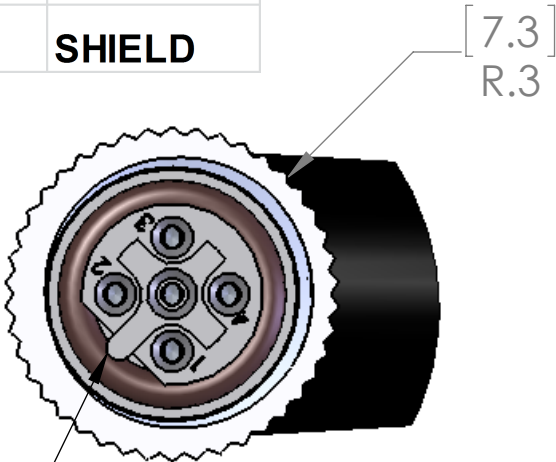

DETAIL B  
SCALE 3 : 1

NOTE 45° INSERT  
KEYING ANGLE RELATIVE  
CABLE

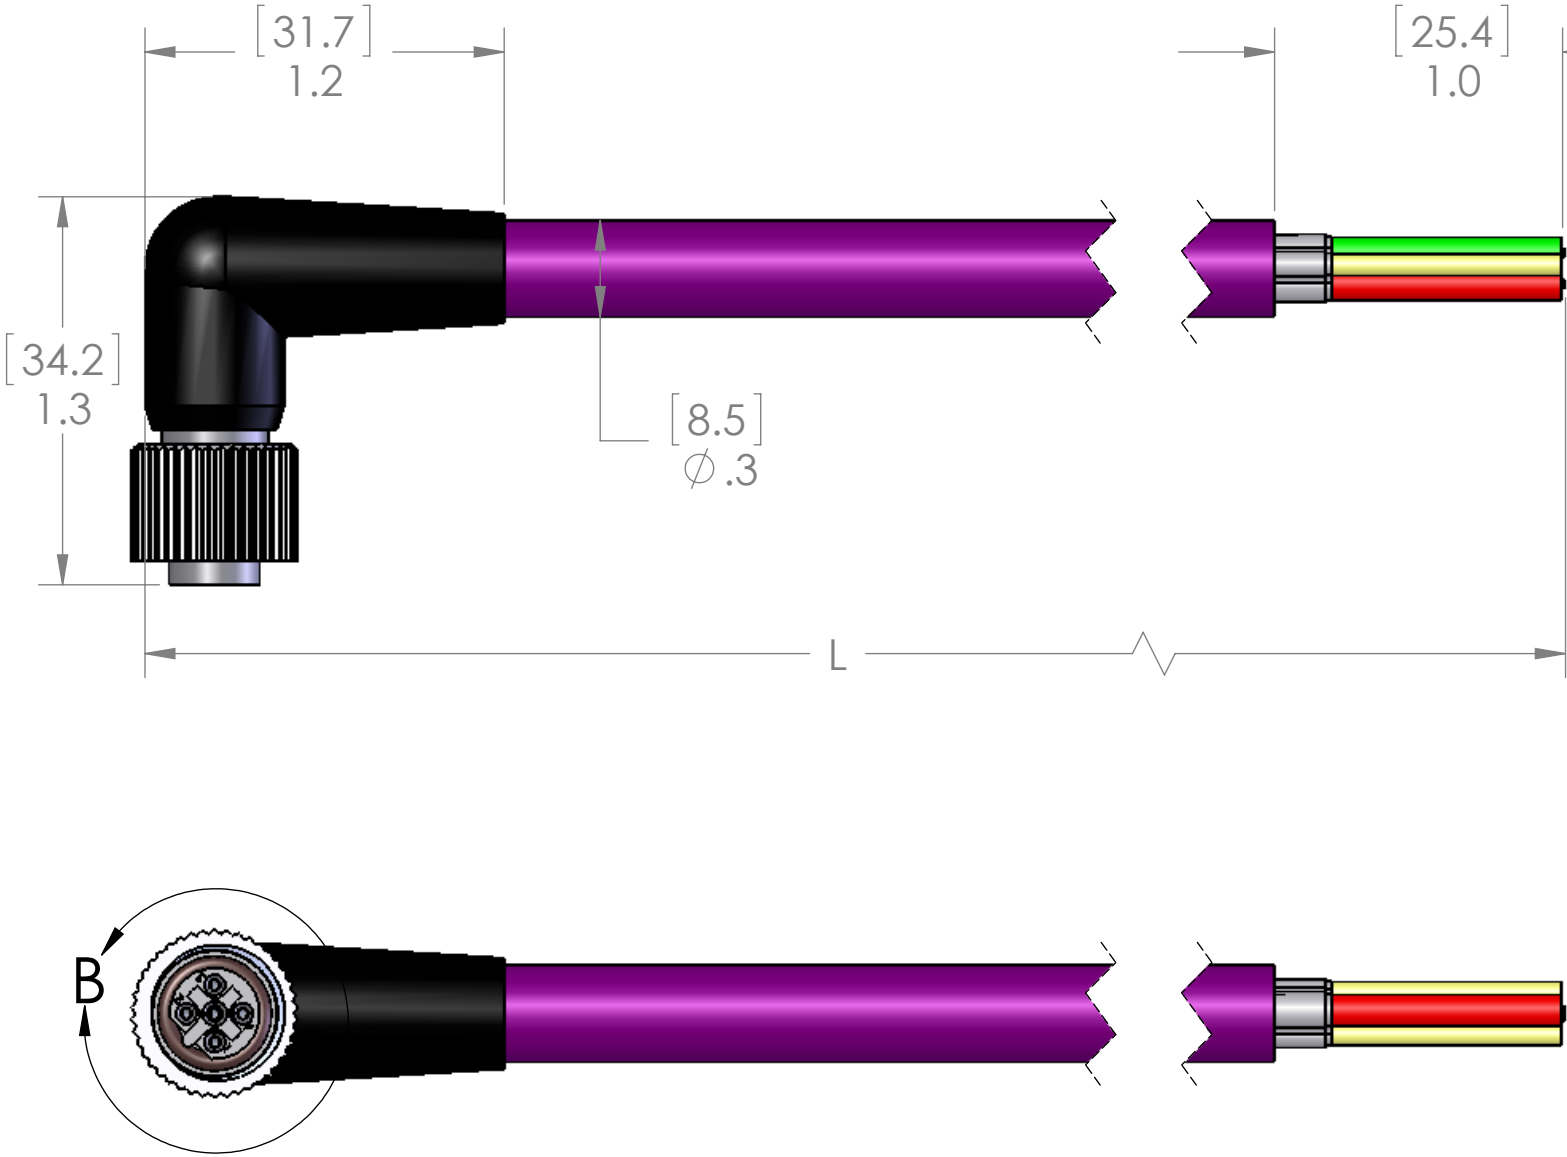

D

C

B

A

TABLE A	
P/N	L
PBEC-3FP-0.5M-R	19"
PBEC-3FP-1M-R	40"
PBEC-3FP-1.5M-R	59"
PBEC-3FP-2M-R	79"
PBEC-3FP-3M-R	118"
PBEC-3FP-4M-R	157"
PBEC-3FP-5M-R	197"
PBEC-3FP-6M-R	236"
PBEC-3FP-8M-R	315"
PBEC-3FP-10M-R	393"
PBEC-3FP-15M-R	590"
PBEC-3FP-20M-R	786"
PBEC-3FP-25M-R	983"
PBEC-3FP-30M-R	1179"

MATERIALS	
BODY:	BLACK PUR
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	22/2 PURPLE PVS PROFIBUS
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	BUNA-N

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	80 °C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:		NAME
	DRAWN	JJH
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
3 POLE FEM PLUG		
SIZE	DWG. NO.	REV
B	PBEC-3FP-ZZ-R	X
SCALE: 3:2	WEIGHT:	SHEET 1 OF 1