REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	10/13/2005

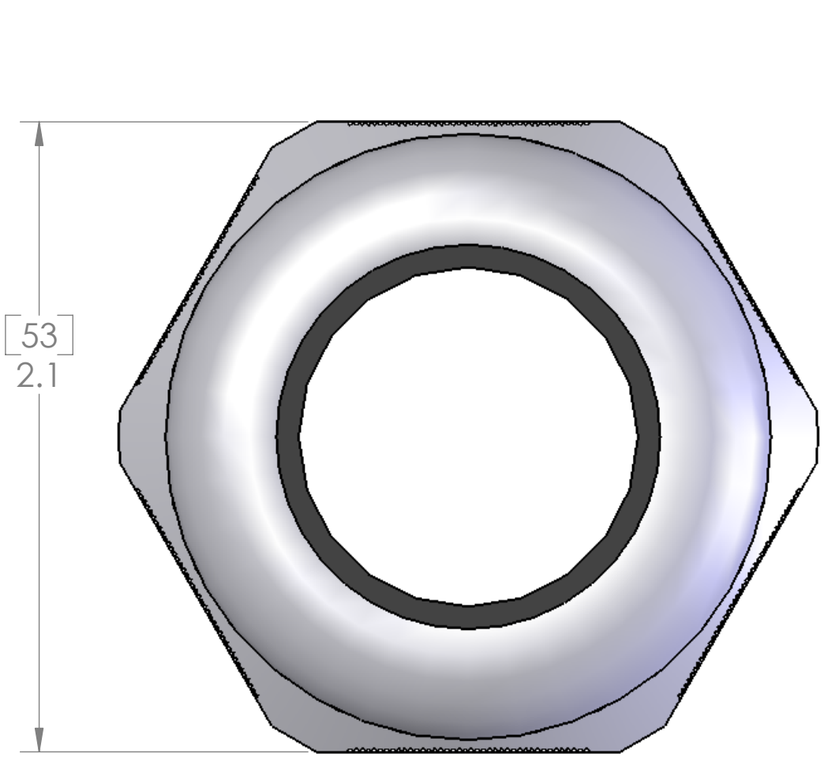

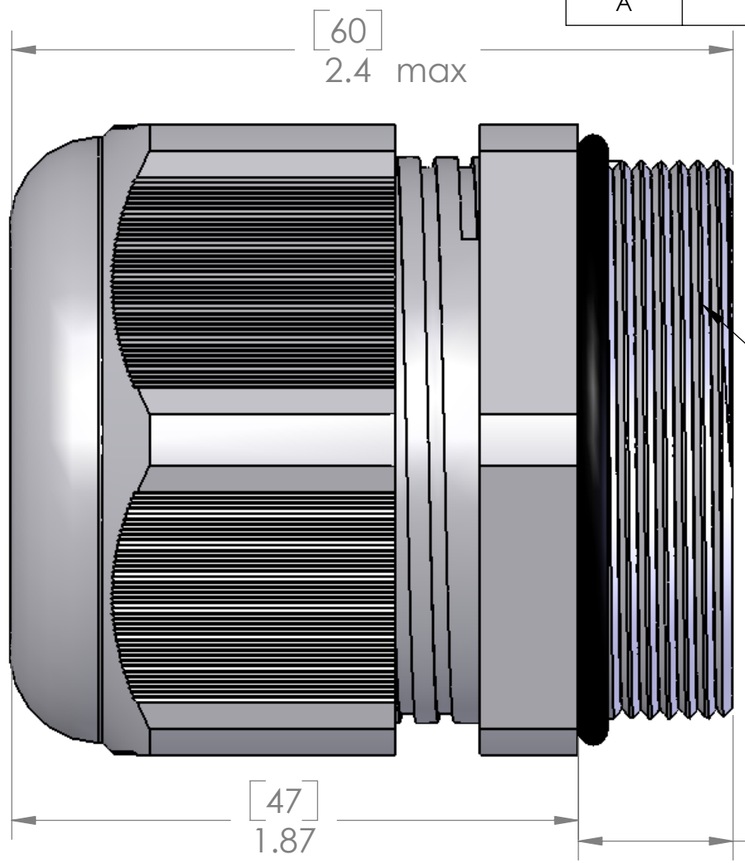

236PA LOCK NUT INCLUDED BUT NOT SHOWN

SEAL RATED T0: IP68

MATERIALS	
BODY:	GRAY OR BLACK POLYAMIDE
GROMMET:	NEOPRENE
O-RING:	BUNA-N

SPECIFICATIONS:	
TIGHTENING TORQUE:	7.5 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PART NUMBER	COLOR	SEALING RANGE
PCG-36	GRAY	22-32mm
PCG-36R	GRAY	20-26mm
PCG-36-B	BLACK	22-32mm
PCG-36R-B	BLACK	20-26mm

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
MATERIAL
FINISH
SPECIFICATIONS
DO NOT SCALE DRAWING

	NAME
DRAWN	CAM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	PCG-36	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1