



WIRING				
CONN 1		CONN 2		CONN 3
1	---	1	---	1
2	---	2	---	2
3	---	3	---	3

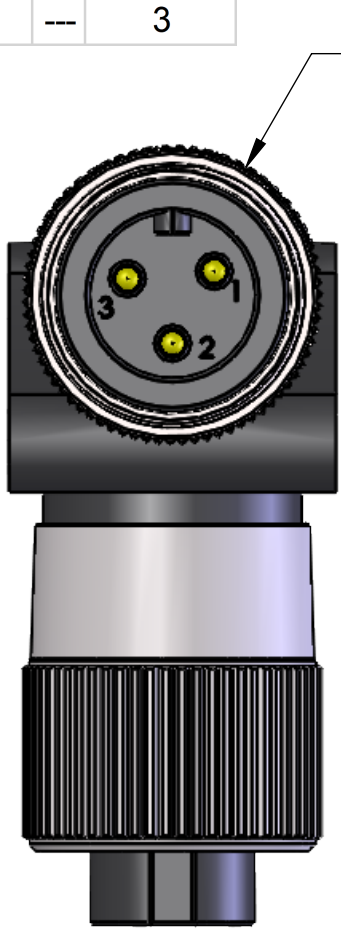


[39]
Ø 1.6

[103]
4.0

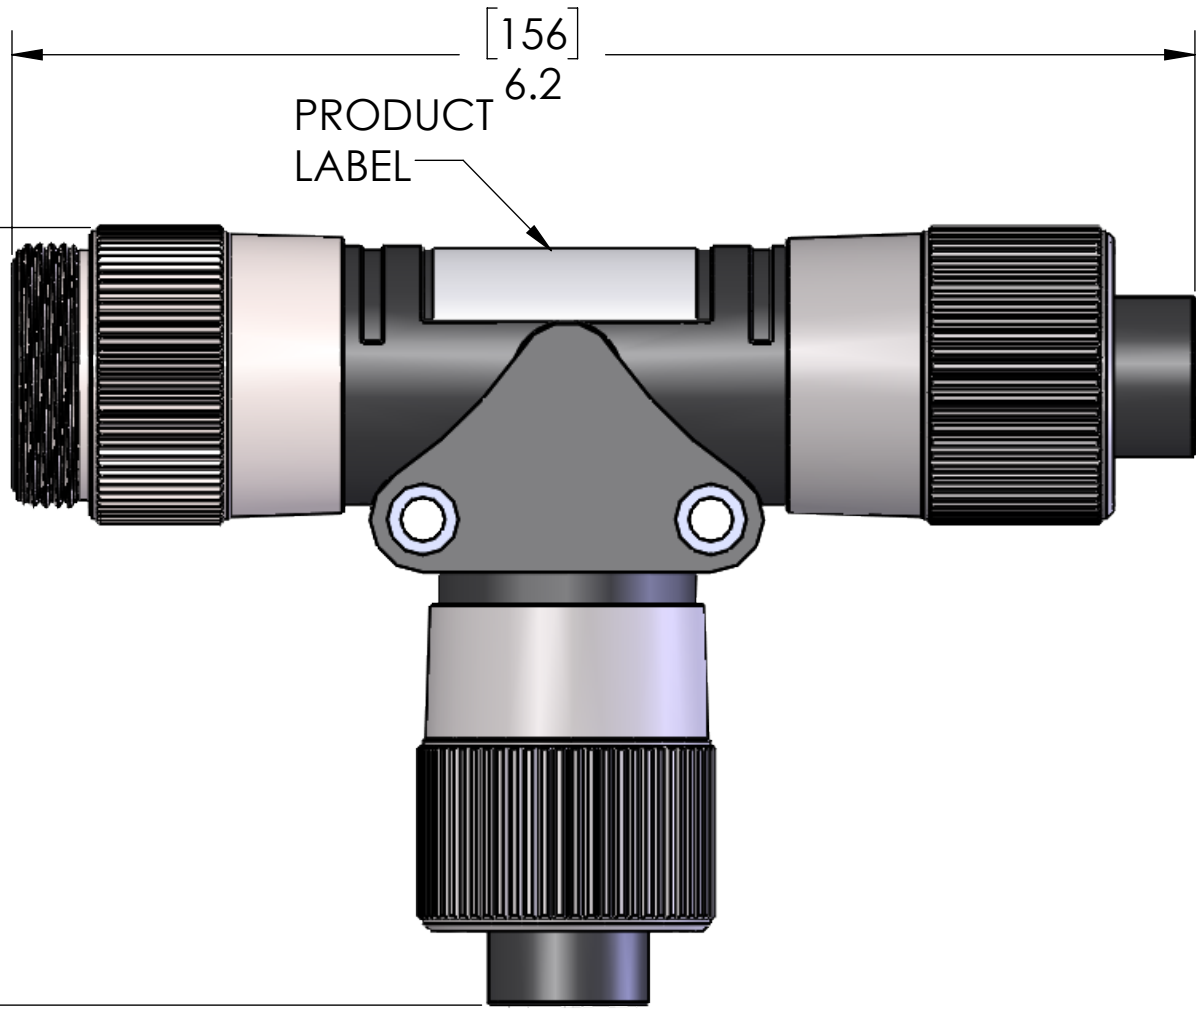


PRODUCT
LABEL

[156]
6.2

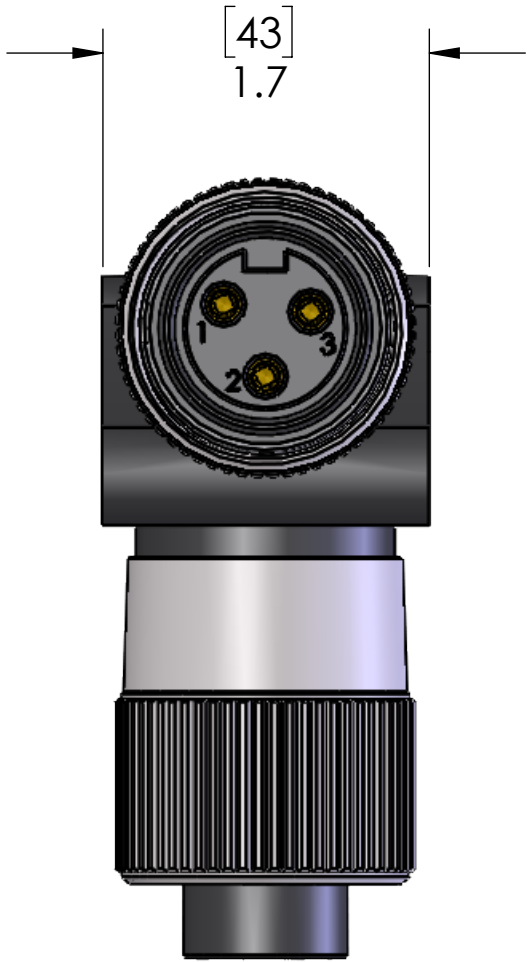

[43]
1.7

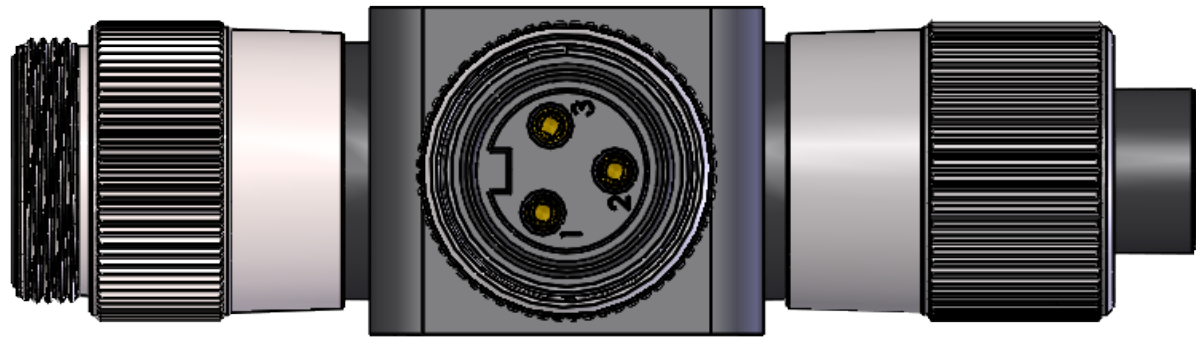

ALL THREADS 1.375-16UN

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	BLACK PVC
COUPLING:	NICKEL PLATED BRASS

RATINGS:	
SCCR RATING:	65kA Breakers and Fuses
RoHS COMPLIANT:	Yes
PROTECTION:	IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.	UL 2237 LISTED, File E469485
CANADA	C-UL 2237 LISTED, File E469485

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	35A
TEMP:	-40° TO 90°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	06/22/2020
CHECKED BY	GO
CHECK DATE	06/23/2020
COMMENTS:	

MENCOM CORPORATION		
TITLE: 3 POL M-F-F MIN T		
SIZE B	DWG. NO. PMIN-30MFF-T	REV B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1



CAUTION:

**RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD**