PIN #	COLOR
1	BLACK
2	GREEN/YELLOW
3	WHITE

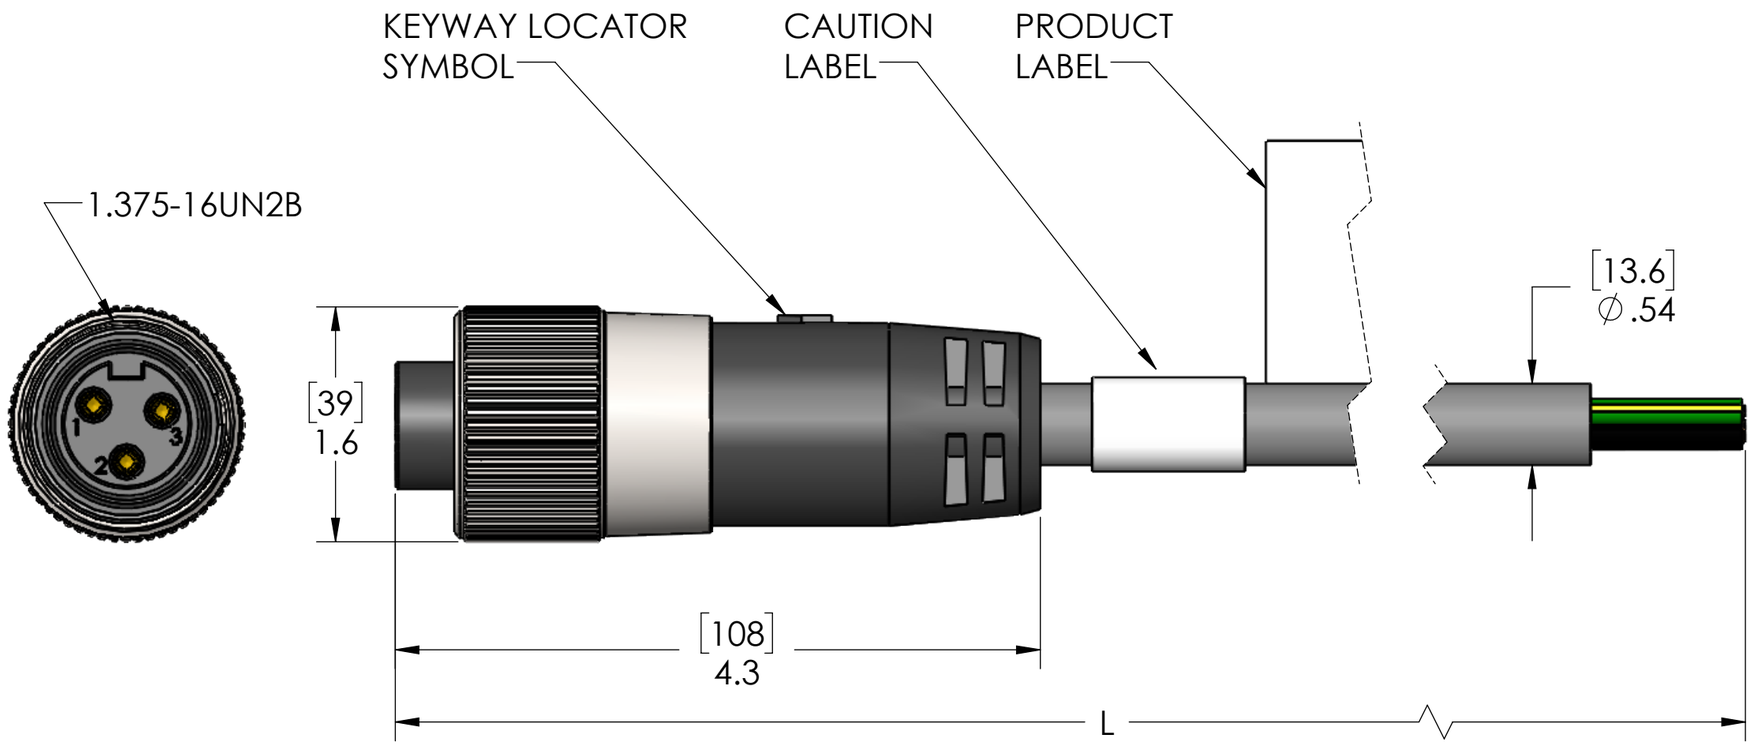

P/N	L	STD?
PMIN-34FP-1M	40" [1m]	YES
PMIN-34FP-2M	79" [2m]	YES
PMIN-34FP-3M	117" [3m]	NO
PMIN-34FP-4M	157" [4m]	YES
PMIN-34FP-5M	197" [5m]	YES
PMIN-34FP-6M	236" [6m]	NO
PMIN-34FP-8M	315" [8m]	NO
PMIN-34FP-10M	393" [10m]	YES
PMIN-34FP-15M	590" [15M]	YES

PARTS LISTED AS NOT BEING STANDARD MAY REQUIRE MINIMUM ORDERS

MATERIALS	
BODY:	BLACK PVC
INSERT:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	14/3 STOOW GRAY PVC
COUPLING:	NICKEL PLATED BRASS

RATINGS:	
SCCR RATING:	65kVA Breakers and Fuses
RoHS COMPLIANT:	Yes
PROTECTION:	IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.	UL 2237 LISTED, File E469485
CANADA	C-UL 2237 LISTED, File E469485

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	24A
TEMP:	-40° to 90°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	06/22/2020
CHECKED BY	GO
CHECK DATE	06/23/2020

COMMENTS:

MENCOM CORPORATION

TITLE:

3 PL FEM PLG PMIN 14AWG

SIZE	DWG. NO.	REV
B	PMIN-34FP-ZZ	B

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1