


PIN #	COLOR
1	BLACK
2	GREEN / YELLOW
3	WHITE

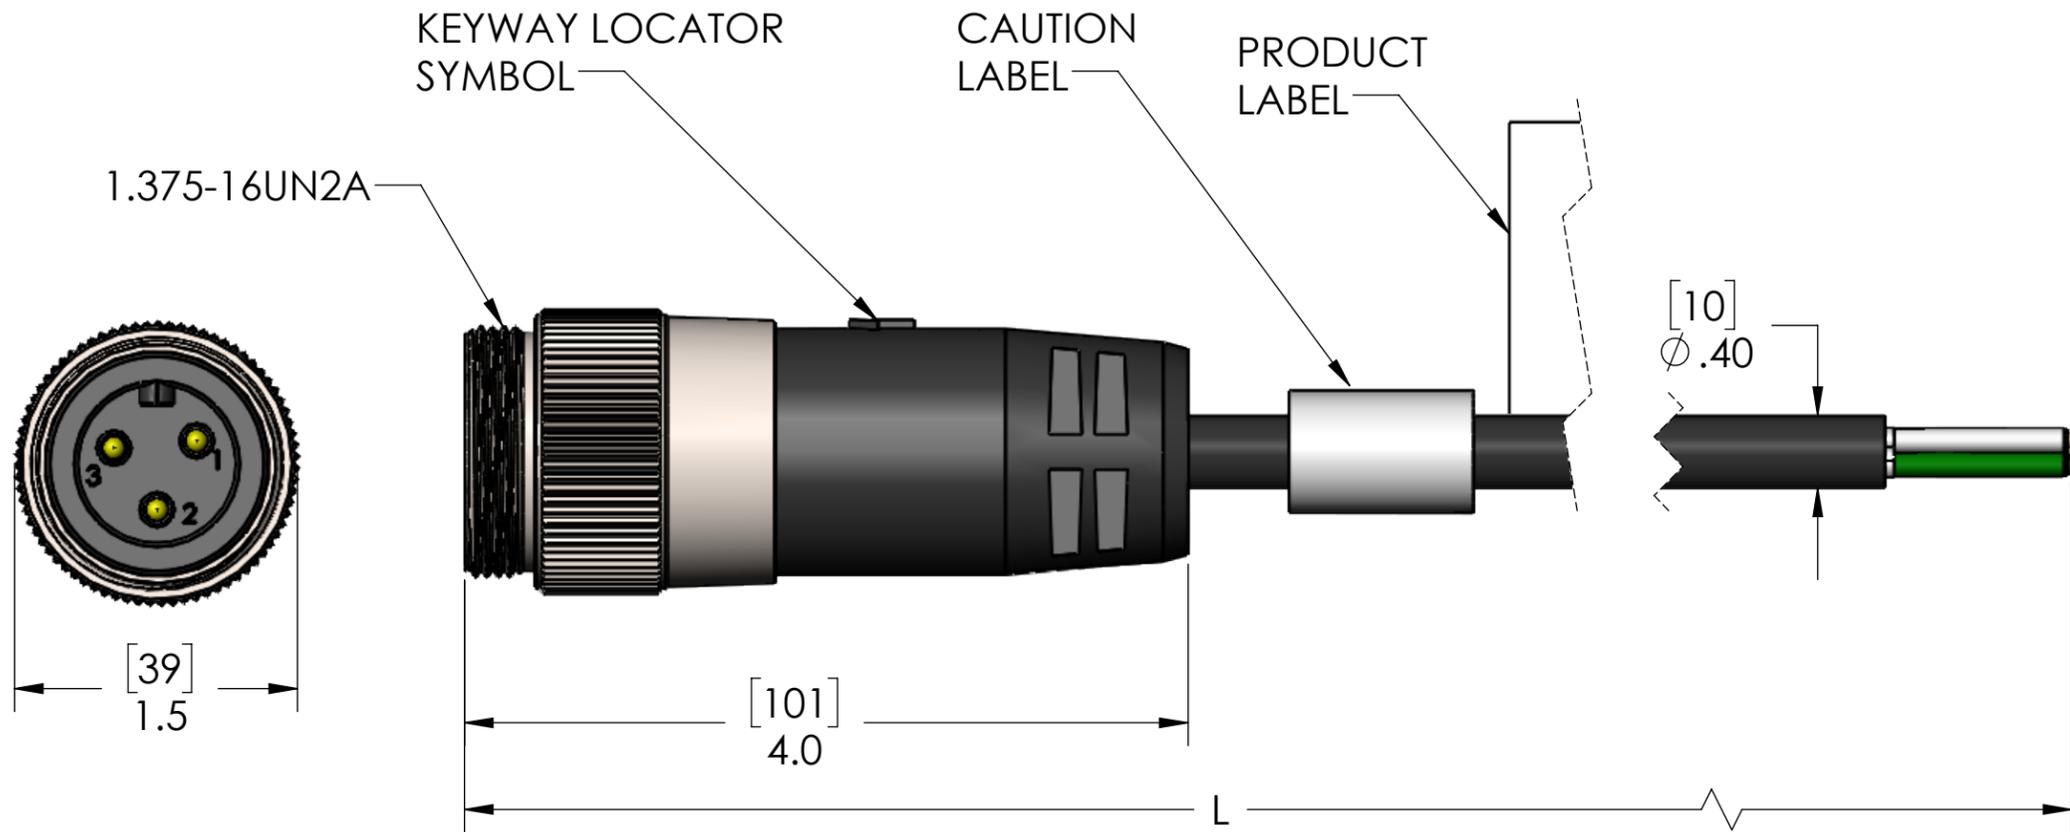

P/N	L	STD?
PMINW-32MP-1M-C011	40" [1m]	YES
PMINW-32MP-2M-C011	79" [2m]	YES
PMINW-32MP-3M-C011	117" [3m]	NO
PMINW-32MP-4M-C011	157" [4m]	YES
PMINW-32MP-5M-C011	197" [5m]	YES
PMINW-32MP-6M-C011	236" [6m]	NO
PMINW-32MP-8M-C011	315" [8m]	NO
PMINW-32MP-10M-C011	393" [10m]	YES
PMINW-32MP-15M-C011	590" [15M]	YES
PMINW-32MP-20M-C011	787" [20M]	YES

PARTS LISTED AS NOT BEING STANDARD  
MAY REQUIRE MINIMUM ORDERS  
OTHER LENGTHS AVAILABLE,  
PLEASE CONSULT FACTORY

MATERIALS	
<b>BODY:</b>	BLACK PVC
<b>INSERT:</b>	BLACK PVC
<b>CONTACTS:</b>	GOLD PLATED COPPER ALLOY
<b>CABLE:</b>	12/3 TC-ER FT4 BLK TPE JKT
<b>COUPLING:</b>	NICKEL PLATED BRASS
RATINGS:	
<b>SCCR RATING:</b>	65kA Breakers and Fuses
<b>RoHS COMPLIANT:</b>	Yes
<b>PROTECTION:</b>	IP67
<b>UL CATEGORY:</b>	PVVA (US), PVVA7 (Canada)
<b>U.S.</b>	UL 2237 LISTED, File E469485
<b>CANADA</b>	C-UL 2237 LISTED, File E469485

**CAUTION:**  
**RISK OF ELECTRICAL SHOCK**  
**DO NOT DISCONNECT UNDER LOAD**

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

<b>VOLTS</b>	600V
<b>AMPS</b>	28A
<b>TEMP:</b>	-40° to 90°C

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	06/22/2020
	CHECKED BY	GO
	CHECK DATE	06/23/2020
COMMENTS:		
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 3 PL MAL PLG PMIN 12AWG		
SIZE	DWG. NO.	REV
<b>B</b>	PMINW-32MP-ZZ-C011	<b>B</b>
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1