
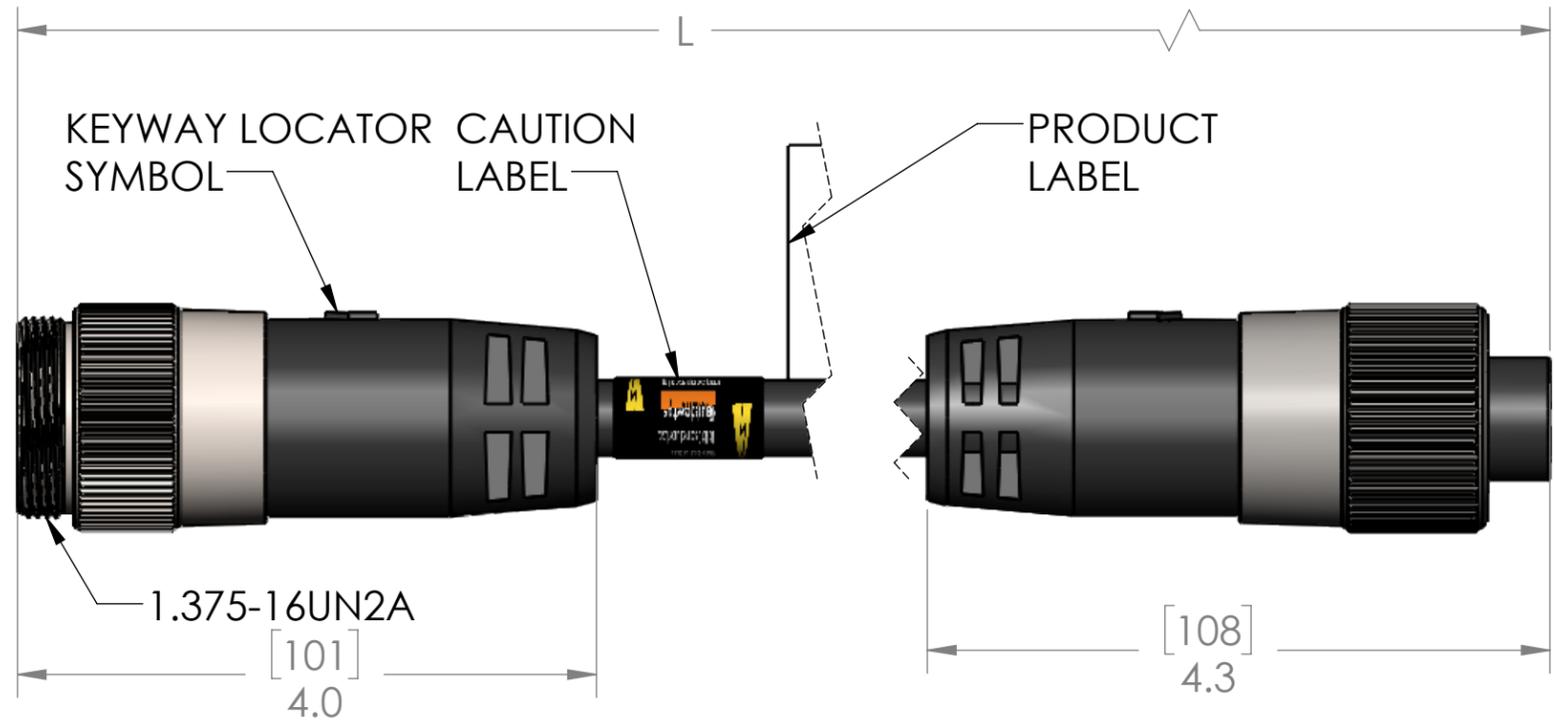


8 7 6 5 4 3 2 1

WIRING	
1	-- 1
2	-- 2
3	-- 3
4	-- 4

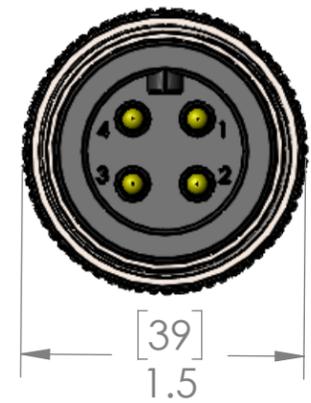

P/N	L	STD?
PMINW-40MFP-0.3M-C011	12"[0.3M]	NO
PMINW-40MFP-1M-C011	40"[1M]	YES
PMINW-40MFP-1.5M-C011	59"[1.5M]	NO
PMINW-40MFP-2M-C011	79"[2M]	YES
PMINW-40MFP-3M-C011	118"[3M]	NO
PMINW-40MFP-4M-C011	157"[4M]	NO
PMINW-40MFP-5M-C011	197"[5M]	YES
PMINW-40MFP-6M-C011	236"[6M]	NO
PMINW-40MFP-8M-C011	315"[8M]	NO
PMINW-40MFP-10M-C011	393"[10M]	YES
PMINW-40MFP-15M-C011	590"[15M]	YES
PMINW-40MFP-20M-C011	786"[20M]	NO
PMINW-40MFP-25M-C011	983"[25M]	NO
PMINW-40MFP-30M-C011	1179"[30M]	NO

MATERIALS	
BODY:	BLACK PVC
INSERT:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	10/4 TC-ER FT4 BLK TPE JKT
COUPLING:	NICKEL PLATED BRASS
RATINGS:	
SCCR RATING:	65kA Breakers and Fuses
RoHS COMPLIANT:	Yes
PROTECTION:	IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.	UL 2237 LISTED, File E469485
CANADA	C-UL 2237 LISTED, File E469485

**CAUTION:**  
**RISK OF ELECTRICAL SHOCK**  
**DO NOT DISCONNECT UNDER LOAD**

PROPRIETARY AND CONFIDENTIAL  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	32A
TEMP:	-40° TO 90°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	06/23/2020
	CHECKED BY	JJH
	CHECK DATE	06/23/2020
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

PARTS LISTED AS NOT BEING STANDARD MAY REQUIRE MINIMUM ORDERS. OTHER LENGTHS AVAILABLE, PLEASE CONSULT FACTORY

<b>MENCOM CORPORATION</b>		
TITLE: 4 PL M-F EXT PLG PMIN 10AWG		
SIZE	DWG. NO.	REV
<b>B</b>	PMINW-40MFP-ZZ-C011	<b>B</b>
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

8 7 6 5 4 3 2 1