


PIN #	COLOR
1	BLACK
2	GREEN / YELLOW
3	RED
4	WHITE

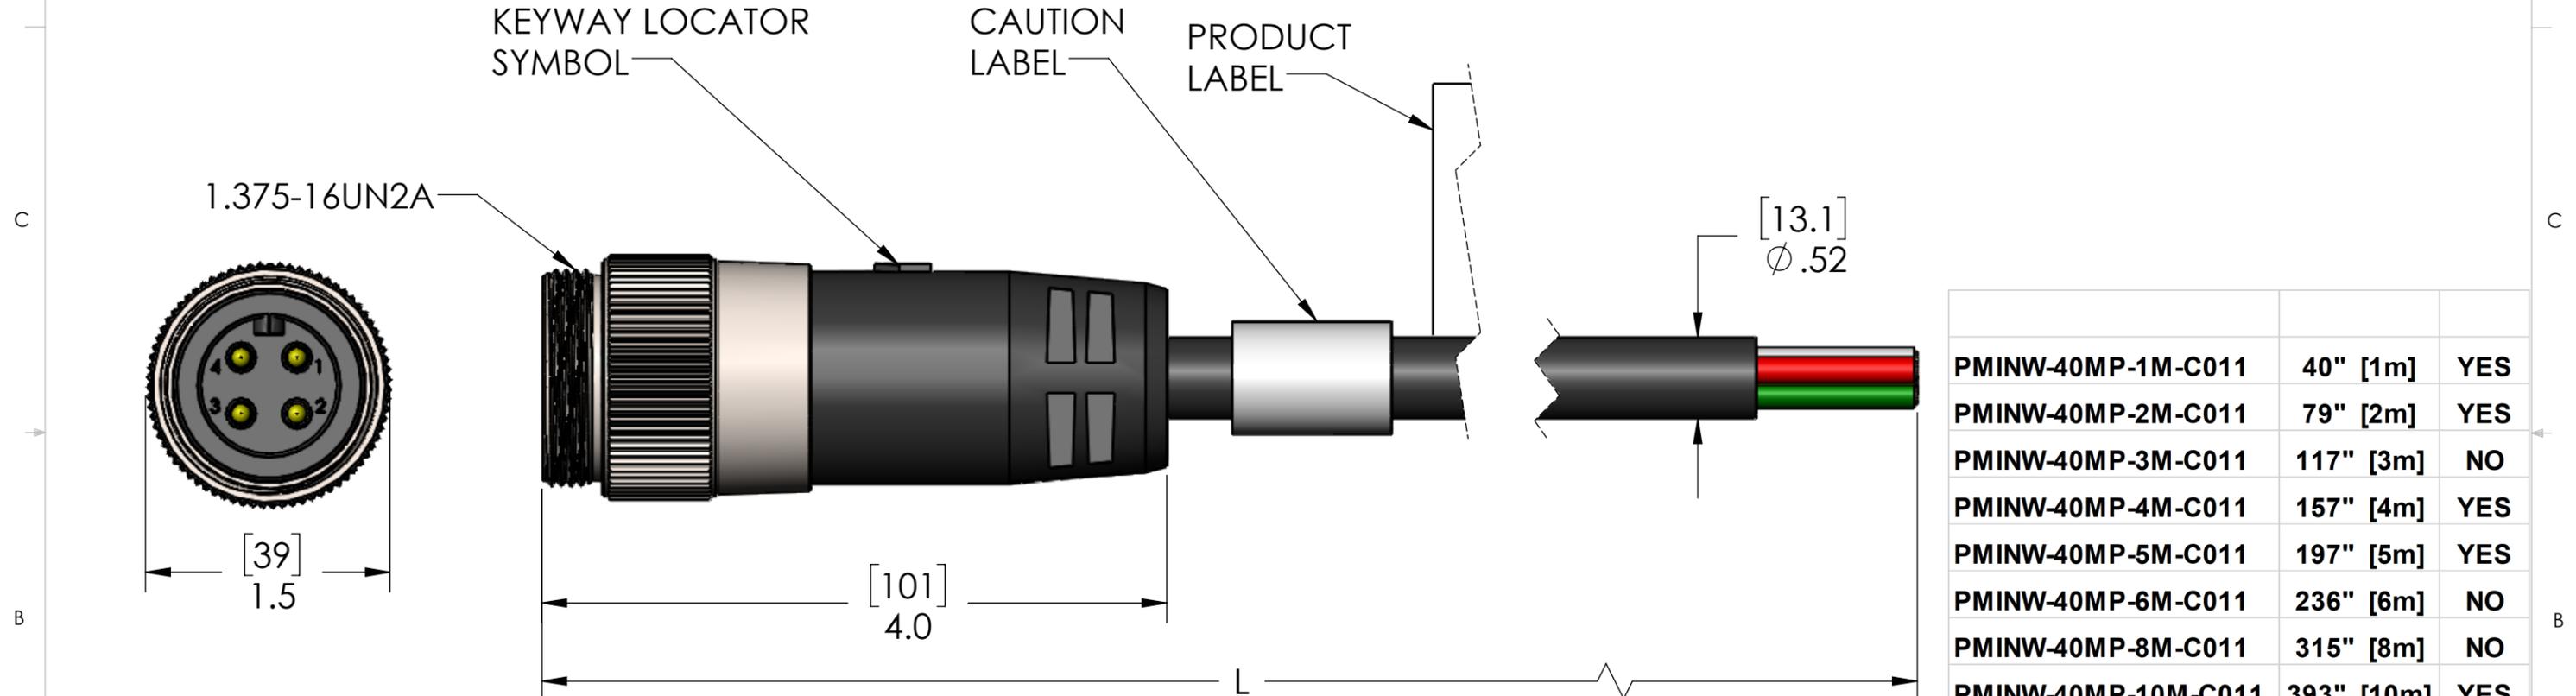

Part Number	Length	Standard
PMINW-40MP-1M-C011	40" [1m]	YES
PMINW-40MP-2M-C011	79" [2m]	YES
PMINW-40MP-3M-C011	117" [3m]	NO
PMINW-40MP-4M-C011	157" [4m]	YES
PMINW-40MP-5M-C011	197" [5m]	YES
PMINW-40MP-6M-C011	236" [6m]	NO
PMINW-40MP-8M-C011	315" [8m]	NO
PMINW-40MP-10M-C011	393" [10m]	YES
PMINW-40MP-15M-C011	590" [15m]	YES
PMINW-40MP-20M-C011	787" [20M]	YES

PARTS LISTED AS NOT BEING STANDARD  
MAY REQUIRE MINIMUM ORDERS  
OTHER LENGTHS AVAILABLE,  
PLEASE CONSULT FACTORY

MATERIALS	
BODY:	BLACK PVC
INSERT:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	10/4 TC-ER FT4 BLK TPE JKT
COUPLING:	NICKEL PLATED BRASS
RATINGS:	
SCCR RATING:	65kA Breakers and Fuses
RoHS COMPLIANT:	Yes
PROTECTION:	IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.	UL 2237 LISTED, File E469485
CANADA	C-UL 2237 LISTED, File E469485

**CAUTION:**  
**RISK OF ELECTRICAL SHOCK**  
**DO NOT DISCONNECT UNDER LOAD**

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	32A
TEMP:	-40° to 90°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	06/22/2020
	CHECKED BY	GO
	CHECK DATE	06/23/2020
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 4 PL MAL PLG PMIN 10AWG		
SIZE	DWG. NO.	REV
<b>B</b>	PMINW-40MP-ZZ-C011	<b>B</b>
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1