
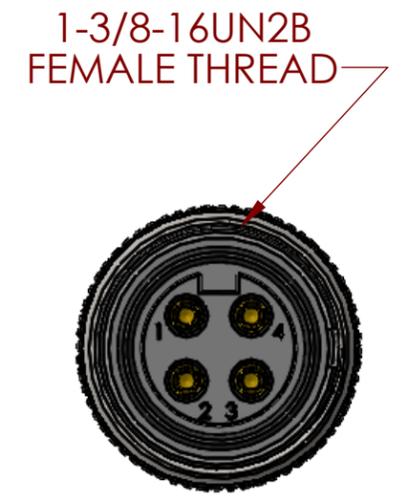
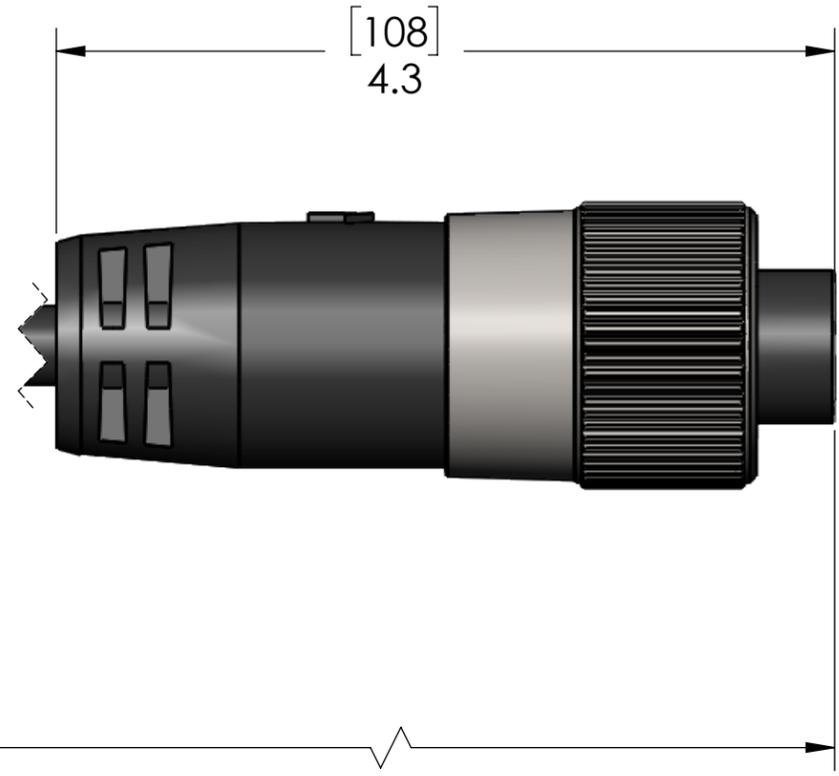
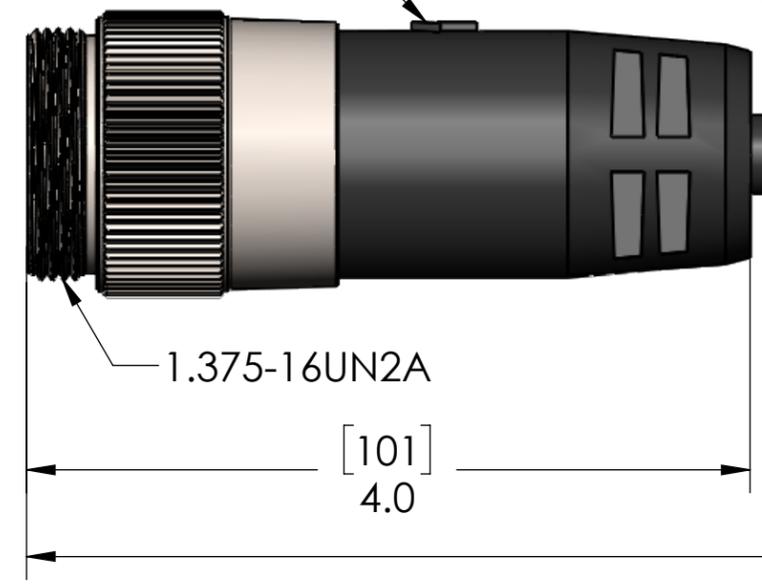


WIRING	
1	-- 1
2	-- 2
3	-- 3
4	-- 4

KEYWAY LOCATOR SYMBOL CAUTION LABEL PRODUCT LABEL

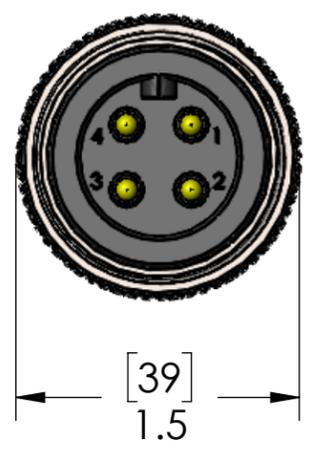

P/N	L
PMINW-42MFP-1M-C011	40" [1m]
PMINW-42MFP-2M-C011	79" [2m]
PMINW-42MFP-3M-C011	117" [3m]
PMINW-42MFP-4M-C011	157" [4m]
PMINW-42MFP-5M-C011	197" [5m]
PMINW-42MFP-6M-C011	236" [6m]
PMINW-42MFP-10M-C011	393" [10m]
PMINW-42MFP-15M-C011	590" [15m]
PMINW-42MFP-20M-C011	787" [20m]

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS
OTHER LENGTHS AVAILABLE,
PLEASE CONSULT FACTORY

MATERIALS	
BODY:	BLACK PVC
INSERT:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	12/4 TC-ER FT4 BLK TPE JKT
COUPLING:	NICKEL PLATED BRASS
RATINGS:	
SCCR RATING:	65kA Breakers and Fuses
RoHS COMPLIANT:	Yes
PROTECTION:	IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.	UL 2237 LISTED, File E469485
CANADA	C-UL 2237 LISTED, File E469485

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	25A
TEMP:	-40° TO 90°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	06/22/2020
	CHECKED BY	GO
	CHECK DATE	06/23/2020
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 4 PL M-F EXT PLG PMIN 12AWG		
SIZE	DWG. NO.	REV
B	PMINW-42MFP-ZZ-C011	B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1