


DRAWING NO.
SE208417

CATALOG NO.	CONDUCTOR	FIG. NO.	DIMENSIONS							INSTALLATION TOOLING TOOL, DIE & NO. OF CRIMPS							DIE INDEX	WIRE STRIP LENGTH	COLOR CODED END PLUG
			B	C	H	L	M REF	O.D.	T REF.	Z MIN	Y35	Y39	Y750	Y45	Y46	Y48B	Y608BU		
YAS361R-2N	500 (37 STR) AL, CU	1	2.46 [62]	1.68 [43]	----	7.55 [192]	1.80 [46]	1.50 [38]	.47 [12]	1.98 [50]								2 1/2"	PINK
YAS0361R-2N	477 (18/1) ACSR	2	2.46 [62]	1.68 [43]	1.34 [35]	7.55 [192]		1.50 [38]	.47 [12]	.88 [22]	U608 (4)	U608 (4)	U608 (4)	U608 (4)	U608 (4)	C722 (2)	L608 (2)	608 722 K1-5/16 CSA28	
YAS39A-2N	700 (61 STR) AL, CU	1	2.46 [62]	1.68 [43]	----	7.63 [194]	1.80 [46]	1.50 [38]	.47 [12]	1.98 [50]								2 1/2"	YELLOW
YAS039A-2N	750 (61 STR) AL, CU	2	2.46 [62]	1.68 [43]	1.34 [35]	7.63 [194]		1.50 [38]	.47 [12]	.88 [22]	U608 (4)	U608 (4)	U608 (4)	U608 (4)	U608 (4)	C722 (2)	L608 (2)	608 722 K1-5/16 CSA28	

REV.	DATE	DESCRIPTION	ECO	BY	C'K'D.
3	10/10/00	REMOVE THE BUG (2 PLCS) AND UPDATE TABLE AND ALSO FORMAT PER ECO.	5980	DB	PL

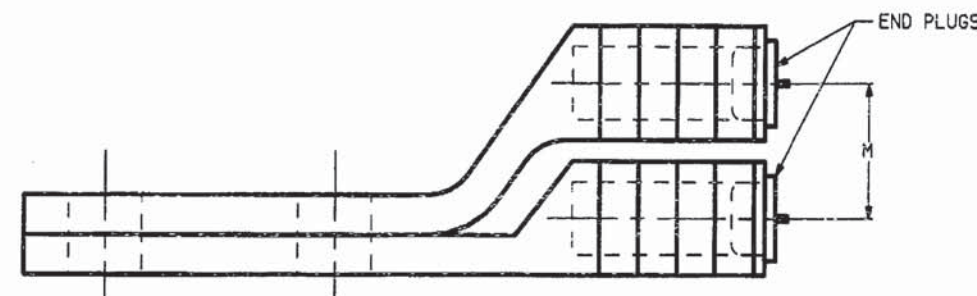

ASSEMBLY VIEW

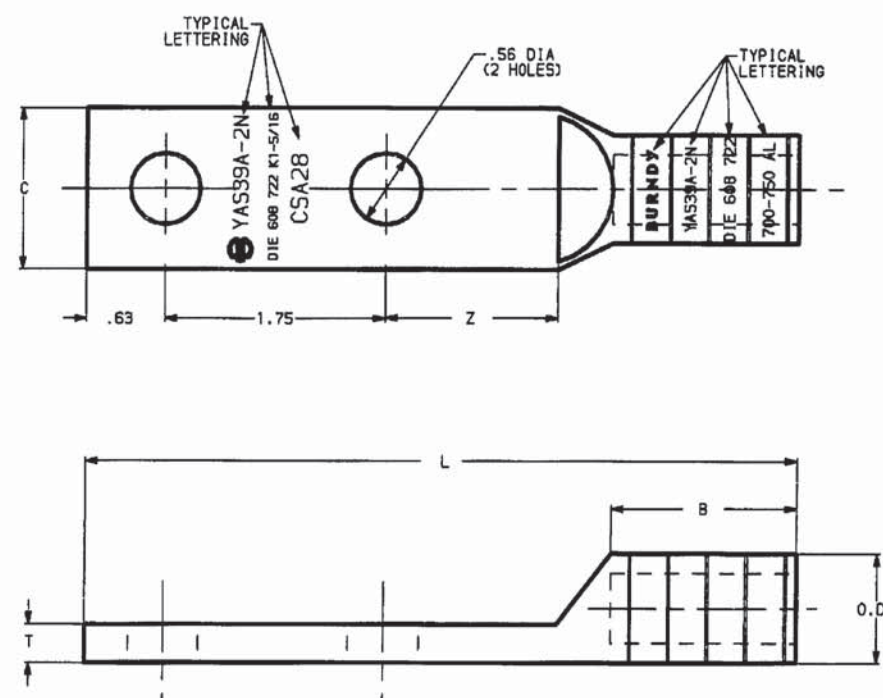


FIG. 1

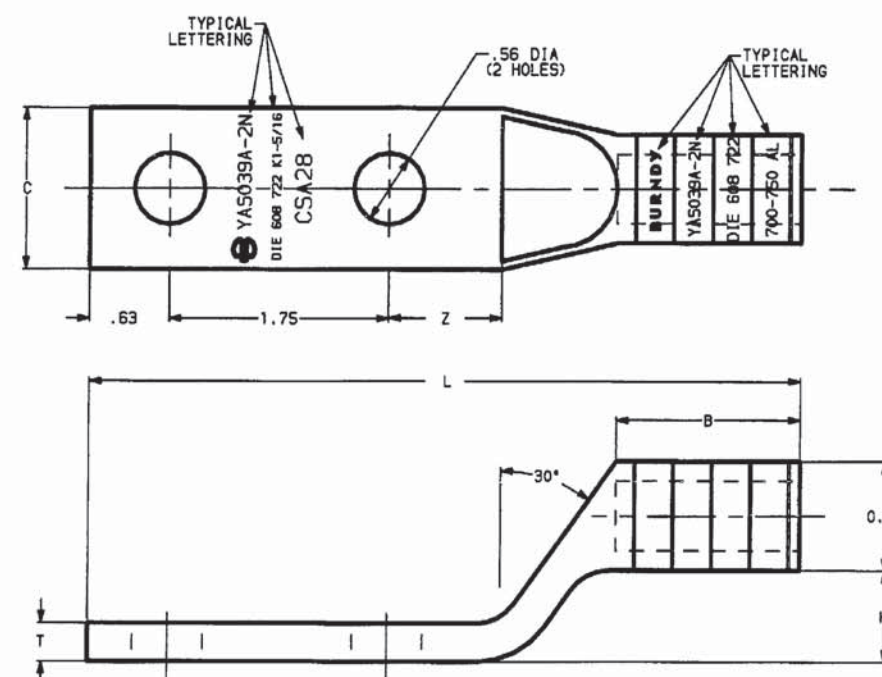


FIG. 2

NOTES:

1. MATERIAL: ALUMINUM TUBING
2. FINISH: TIN PLATING IS OPTIONAL, ADD -TN TO CAT. NO.
3. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.
4. PT6515 ADAPTOR IS REQUIRED FOR U-DIES IN Y45.
5. PUADP-1 ADAPTOR IS REQUIRED FOR U-DIES IN Y46.
6. OPTIONAL SEALED BARREL; ADD "-P" TO CATALOG NO.
7. TERMINALS ARE PREFILLED WITH PENETROX® A13 AND SEALED.

TO ORDER BURNDY PRODUCTS CALL 1-800-346-4175 MANCHESTER, NH 03105, USA FOR PRODUCT INFO = http://www.felconnect.com			
STACKING HYLUG™			
CAT NO: YAS-A-2N, YAS0-A-2N, YAS-R-2N, YAS0-R-2N		SCALE N/A	
DRAWN: J. MICHAUD		12/9/94	
DSGN APPVL: C. PALAGI		12/9/94	
MKTG APPVL: D. HAMILTON		12/9/94	
CAD FILE: SE208417-04_3			
MOL REF: N/A			
DRAWING NO. SE208417		REV 3	
SHEET 4 OF 4			

