

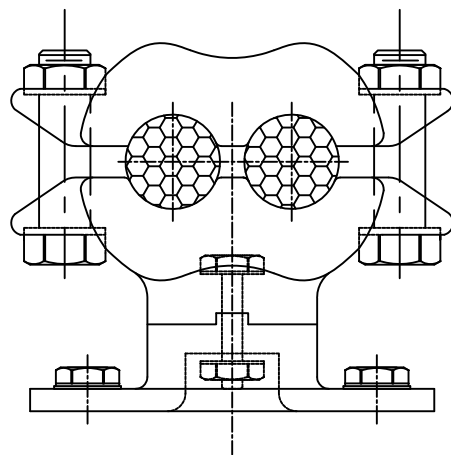



SHOP NOTE:
TORQUE TO 480 IN. LBS.

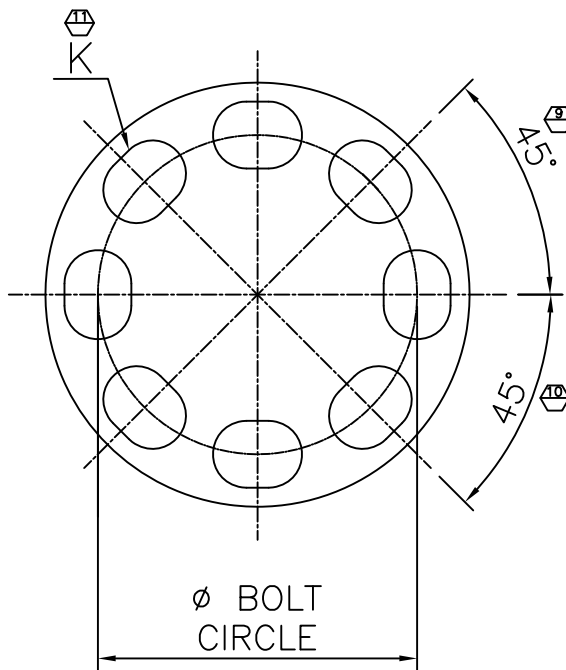

ITEMS WITH ASTERISK *
WILL BE OF THIS DESIGN

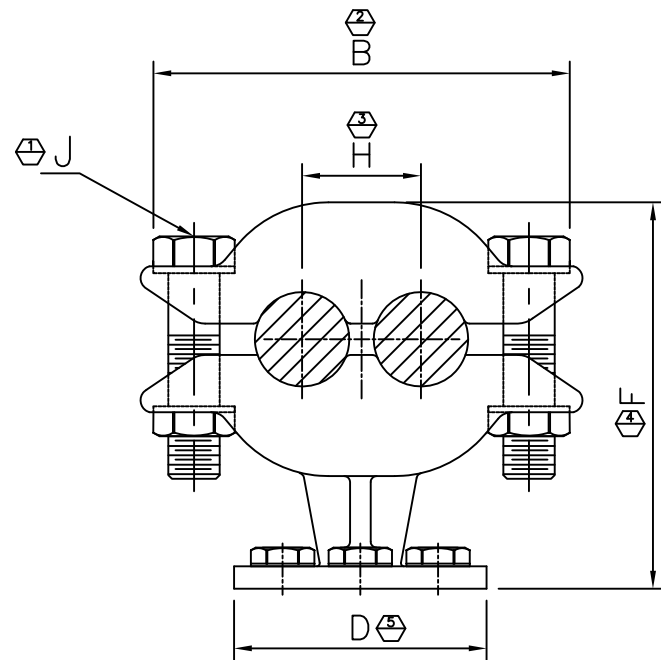

BOLT CIRCLE DIA. IS GIVEN AS
LAST DIGIT IN CATALOG NUMBER.

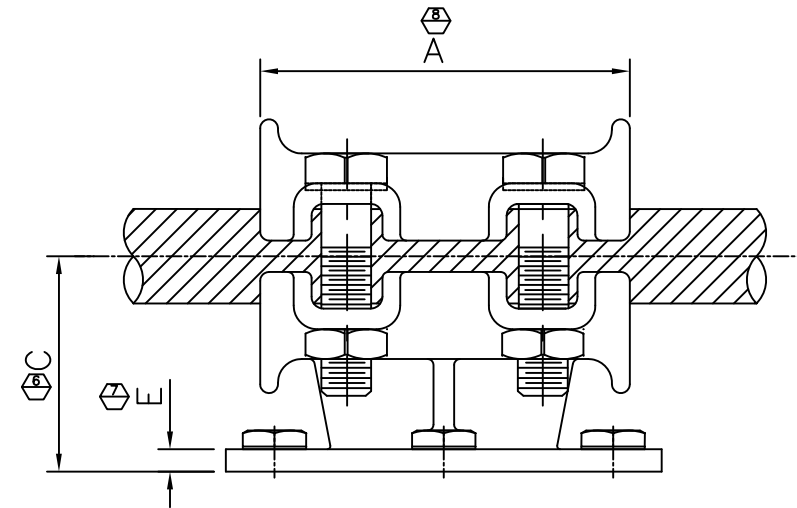

INSPECTION SYMBOL DRAWING
SYMBOLS USED: 1-11
SYMBOLS NOT USED: NONE

NOTES:

- MATERIAL:
CASTINGS - ELECTRICAL BRONZE
CLAMPING HARDWARE - SILICON BRZ.
MOUNTING HARDWARE - GALV. STEEL.
- REGULARLY SUPPLIED WITH CAP SCREWS FLAT AND LOCK WASHERS FOR MOUNTING TO CAP OF INSULATOR - WHEN MOUNTING TO BASE OF INSULATOR IS REQUIRED, ADD SUFFIX "B" TO CAT. NO. TO ASSURE OBTAINING PROPER LENGTH BOLTS AND NUTS IN ADDITION TO FLAT WASHERS AND LOCK WASHERS EXAMPLE- CDSB-40-3-B.
- ADD SUFFIX "TP" TO CATALOG TO REQUEST A TIN PLATED CONNECTOR.
EXAMPLE-CDSB-40-3-TP
- CLASSIFICATION OF DIMENSIONS AND REQUIREMENTS FOR INSPECTION:

CRITICAL -- XX C MAJOR -- XX M MINOR -- XX

68681	03/03/2017	HG	HG	ANDERSON TOLERANCE CHART		HUBBELL® POWER SYSTEMS	
EC #	DATE	CHG BY	RESP ENG			TITLE BUS SUPPORT	
DESC OF DWG: UPDATE DRAWING TO AUTOCAD FILE				CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.		TWO CABLES OR IPS'S TO BASE	
REASON (S) FOR CHANGE: -- DISPOSITION OF MAT'L: --				SIZE C	DWG NO. C-4130	CAT / PART / ASSY NO. CDSB	REV 10
				DO NOT SCALE THIS DRAWING	DRN BY VJS	DATE 2-1-55	SHEET 1 OF 2
				THIS SYMBOL IDENTIFIES CRITICAL FEATURES			

CATALOG NUMBER	CONDUCTOR		DIMENSIONS IN INCHES								
	CABLE	IPS	A	B	C	D	E	F	H	J	K
CDSB-40-3	#8-4/0	1/8" - 1/4"	2.250	3.750	2.250	4.250	.375	3.250	1.000	0.375	.563 X .750
CDSB-50-3*	250-500 MCM	3/8" - 1/2"	2.250	3.625	2.375	4.250	.375	3.188	1.250	0.375	.563 X .750
CDSB-75-3 *	550-750 MCM	1/2"	3.000	4.500	2.750	4.250	.375	3.875	1.500	0.500	.563 X .750
CDSB-100-3	800-1000 MCM	3/4"	2.500	4.500	2.625	4.250	.375	3.625	1.750	0.375	.563 X .750
CDSB-150-3	1250-1500 MCM	1"	2.500	4.813	2.750	4.250	.375	3.375	1.875	0.375	.563 X .750
CDSB-200-3	1500-2000 MCM	1"	2.500	5.250	2.875	4.250	.375	4.250	2.000	0.375	.563 X .750
CDSB-250-3	2000-2500 MCM	1-1/4"	2.500	5.625	3.000	4.250	.375	4.375	2.250	0.375	.563 X .750
CDSB-40-5	#8-4/0	1/8" - 1/4"	2.250	3.750	2.250	6.250	.375	3.250	1.000	0.375	.688 X .875
CDSB-50-5	250-500 MCM	3/8" - 1/2"	2.250	3.625	2.375	6.250	.375	3.188	1.250	0.375	.688 X .875
CDSB-75-5 *	550-750 MCM	1/2"	3.000	4.500	2.750	6.250	.375	3.875	1.500	0.500	.688 X .875
CDSB-100-5	800-1000 MCM	3/4"	2.500	4.500	2.625	6.250	.375	3.625	1.750	0.375	.688 X .875
CDSB-150-5	1250-1500 MCM	1"	2.500	4.813	2.750	6.250	.375	3.875	1.875	0.375	.688 X .875
CDSB-200-5	1500-2000 MCM	1"	2.500	5.250	2.875	6.250	.375	4.250	2.000	0.375	.688 X .875
CDSB-250-5	2000-2500 MCM	1-1/4"	2.500	5.625	3.000	6.250	.375	4.375	2.250	0.375	.688 X .875
CDSB-100-3-1/2	800-1000 MCM	3/4"	2.563	4.813	2.625	4.250	.375	3.625	1.750	0.500	.563 X .750

68681	03/03/2017	HG	HG
EC #	DATE	CHG BY	RESP ENG
DESC OF DWG: UPDATE DRAWING TO AUTOCAD FILE --- --- --- REASON (S) FOR CHANGE: -- DISPOSITION OF MAT'L: --		ANDERSON TOLERANCE CHART CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.	
TITLE BUS SUPPORT TWO CABLES OR IPS'S TO BASE		SIZE C	DWG NO. C-4130
CAT / PART / ASSY NO. CDSB		DO NOT SCALE THIS DRAWING	DRN BY RJ
DATE 12-14-70		SHEET 2 OF 2	
REV 10		THIS SYMBOL IDENTIFIES CRITICAL FEATURES	