



8 7 6 5 4 3 2 1

D
C
B
A

D
C
B
A



12345678

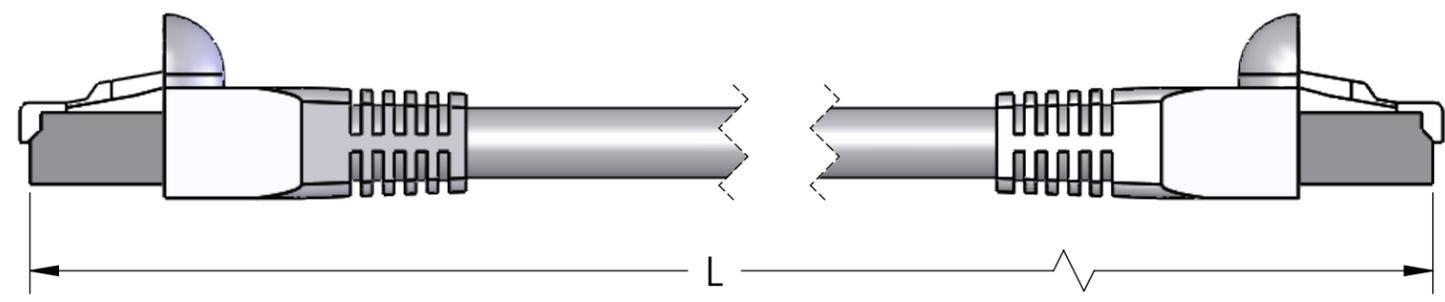

12345678

Category 5e 350 MHz Shielded cables per TIA/EIA-568-B.2-10.
 Cable: 4 Pr 24AWG with foil shield and drain, gray PVC jacket.
 RoHS Compliant

RJ45S-IC-03-GY	36" [0.9m]
RJ45S-IC-07-GY	84" [2.1m]
RJ45S-IC-10-GY	120" [3.0m]
RJ45S-IC-14-GY	168" [4.3m]
RJ45S-IC-25-GY	300" [7.6m]
RJ45S-IC-50-GY	600" [15.2m]
RJ45S-IC-75-GY	900" [22.9m]
RJ45S-IC-100-GY	1200" [30.5m]

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	JJH
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	05/21/2019
	CHECKED BY	ADM
	CHECK DATE	05/21/2019
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		
COMMENTS:		

MENCOM CORPORATION		
TITLE: 4 PR CAT 5e SHLDD EXT CBL		
SIZE	DWG. NO.	REV
B	RJ45S-IC-ZZ-GY	A
SCALE: 3:2	WEIGHT:	SHEET 1 OF 1

8 7 6 5 4 3 2 1