
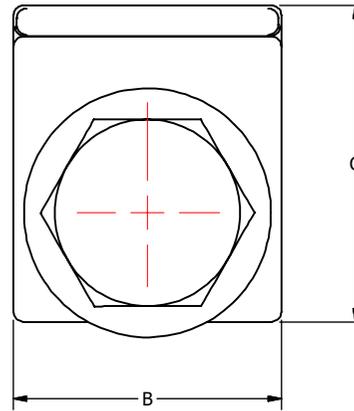
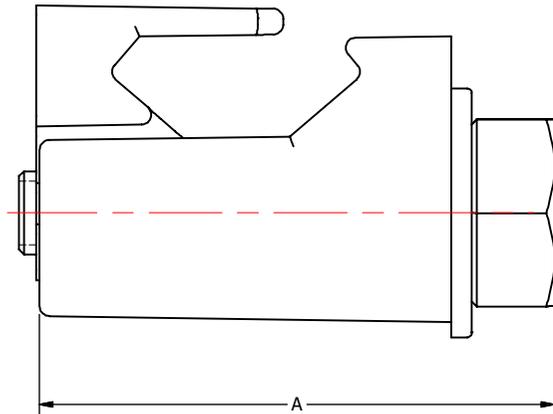


S.NO	CATALOG NUMBER	A	B	C	WIRE RANGE
1	VC-2	1.56 [40]	.81 [21]	.95 [24]	#2 SOL- 6 SOL
2	VC-20	1.84 [47]	.84 [21]	1.08 [27]	1/0 STR - #4 SOL
3	VC-20S	2.02 [51]	1.00 [25]	1.17 [30]	2/0 STR - #3 SOL
4	VC-2S	1.19 [30]	.84 [21]	1.02 [26]	2 STR - #5 SOL
5	VC-4	1.58 [40]	.78 [20]	.89 [23]	4 STR - #8 SOL
6	VC-40	2.38 [60]	1.00 [25]	1.36 [34]	4/0 STR - #1 SOL

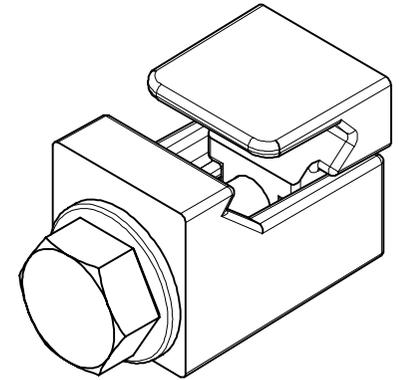

1. MATERIAL: BRONZE
2. COMPLIES WITH ALL ANSI SPECIFICATIONS AND PROVIDES A VIBRATION-PROOF CONNECTION
3. ONE-PIECE DESIGN ELIMINATES LOOSE PARTS AND DANGER OF CROSS THREADING. "V" GROOVES ASSURE PERFECT ALIGNMENT OF CONDUCTORS AND PROVIDE SELF-CLEANING DURING INSTALLATION
4. THE LONG THREAD ENGAGEMENT PROVIDES STRENGTH, EASE OF COVERING AND PROTECTION FROM THE ELEMENTS FOR REMOVAL AND REUSE
5. HIGH PRESSURE BETWEEN CONDUCTORS AT LOW TORQUE ASSURES A STRONG MECHANICAL JOINT AND HIGH ELECTRICALLY CONDUCTIVE CONTACTS
6. EASY INSTALLATION WITH GLOVES OR "HOT STICKS"
7. OVERLAPPING WIDE RANGE AND COMPLETE SELECTION FOR ALL CONDUCTORS, PERMITS SMALLER INVENTORY
8. THE BROAD BASE PERMITS ASSEMBLY ON STRUCTURES OR PADS AS A GROUND CONNECTOR FOR CABLE FLAT APPLICATIONS.

				TO ORDER CMC PRODUCTS		DRAWN BY: TS		NAME OF PART:		CAT. NO.:	
				UNITED STATES 1-513-860-4455		09-04-20		DISTRIBUTION CONNECTOR		SEE TABLE	
				CANADA 1-800-361-6975		CHECKED BY:		DWG NO:		B	
				MEXICO 011-52-722-265-4400				U55700351-S (CHARTED)			
A NEW DRAWING CREATED				09-04-20		TS		DRAWING NOT TO SCALE		SHEET NO: 1 OF 1	
REV. DESCRIPTION				ECN		DATE		INIT.			

THIS INFORMATION IS PROPRIETARY TO CONNECTOR MFG. CO. AND IS NOT TO BE DISCLOSED OUTSIDE OF CONNECTOR MFG. CO. WITHOUT A CONFIDENTIALITY AGREEMENT



CONNECTOR MANUFACTURING CO.

HAMILTON, OHIO