

T-TYPE / C low-temperature HYGIENIC SERIES

inserts		page:
CDD	24 poles + ⊕	76
CDS	9 poles + ⊕	-
CDSH	9 poles + ⊕	86
CDSH NC	6 poles + ⊕	95
CNE	6 poles + ⊕	110
CSE	6 poles + ⊕	-
CSH	6 poles + ⊕	110
CSH S	6 poles + ⊕	122
CCE	6 poles + ⊕	130
CSS	6 poles + ⊕	148
CT, CTSE (16A) *	6 poles + ⊕	160
CQE	10 poles + ⊕	168
MIXO	2 modules	262 - 317

*) only for standard insulating version THIC

housings with single lever SILICONE gasket




hoods with single lever, top entry covers, SILICONE gasket



description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic lever	THIC 06 L			
surface mounting housing, thermoplastic lever, high construction	TAPC 06 L25	25		
surface mounting housing, thermoplastic lever, high construction	TAPC 06 L32	32		
with thermoplastic lever and gasket, high construction			TAVC 06 LG25	25
with thermoplastic lever and gasket, high construction			TAVC 06 LG32	32
cover with thermoplastic lever and gasket				THCC 06 LG

panel cut-out for bulkhead mounting housings



TMA0
Hoods
(page 480)




TMAV
Hoods
(page 480)


TCHC
TCHC S
Covers
with eyelet
(page 481)



THIC L




TAPC L

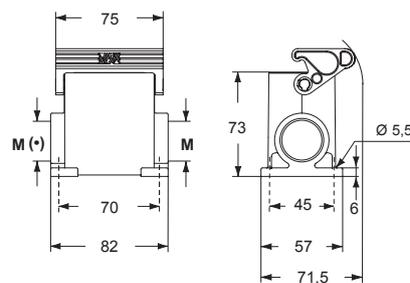


(+) The surface mounting, high construction housings are supplied with an open threaded entry (+) and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).


TAVC LG



THCC LG



For fixing on hoods



CAIUS Type 12



ambient temperature limits -50 °C / +70 °C