

T-TYPE insulating STANDARD APPLICATIONS

inserts		page:
CD	40 poles +	70
CDD	72 poles +	79
CDS	27 poles +	-
CDSH	27 poles +	88
CNE	16 poles +	112
CSE	16 poles +	-
CSH	16 poles +	112
CSH S	16 poles +	124
CCE	16 poles +	132
CMSH, CMCE	6+2 (aux) poles +	138 - 139
CSS	16 poles +	150
CT, CTSE (16A) *)	16 poles +	162
CQE	32 poles +	170
CQEE	40 poles +	176
CP	6 poles +	178
CX	6/12, 6/36 and 12/2 poles +	197 - 199
CX	4/0 and 4/2 poles +	200 - 201
MIXO	4 modules	262 - 317

*) only for standard insulating version TCHI

hoods with double lever top entry




covers




description	part No.	entry M	part No. (with eyelet)	part No. (with loop)
with thermoplastic levers and gasket, high construction	TMAV 16 G32	32		
with thermoplastic levers and gasket, high construction	TMAV 16 G40	40		
with 4 pegs			TCHC 16	TCHC 16 S
with 2 thermoplastic levers and gasket				TCHC 16 G


TMAV G



TCHC (S)




TCHC G

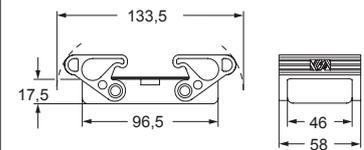


For fixing on housings

eyelet



For fixing on hoods

loop



CAIUS® Type 12



ambient temperature limits -40 °C / +90 °C