

T-TYPE / H production lines HYGIENIC SERIES

inserts		page:
CDD	42 poles + ⊕	78
CDS	18 poles + ⊕	-
CDSH	18 poles + ⊕	87
CNE	10 poles + ⊕	111
CSE	10 poles + ⊕	-
CSH	10 poles + ⊕	111
CSH S	10 poles + ⊕	123
CCE	10 poles + ⊕	131
CMSH	3+2 (aux) poles + ⊕	136
CMCE	3+2 (aux) poles + ⊕	137
CSS	10 poles + ⊕	149
CT, CTSE (16A) *)	10 poles + ⊕	161
CQE	18 poles + ⊕	169
CX	8/24 poles + ⊕	194
MIXO	3 modules	262 - 317

*) only for standard insulating version THIH

housings with double lever HNBR gasket




hoods with double lever, top entry covers, HNBR gasket



description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic levers	THIH 10			
surface mounting housing, thermoplastic levers, high construction	TAPH 10.25	25		
surface mounting housing, thermoplastic levers, high construction	TAPH 10.32	32		
with thermoplastic levers and gasket, high construction			TAVH 10 G25	25
with thermoplastic levers and gasket, high construction			TAVH 10 G32	32
with 2 thermoplastic levers and gasket				THCH 10 G

panel cut-out for bulkhead mounting housings



TMAO
Hoods
(page 482)




TMAV
Hoods
(page 482)


THCH
TCHC S
Covers
with eyelet
(page 483)



THIH

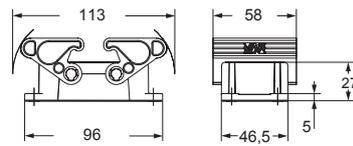


TAPH

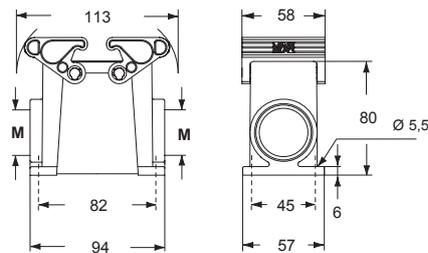


The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).


TAVH G



THCH G



For fixing on hoods



CAVUS Type 12



ambient temperature limits -40 °C / +70 °C