

T-TYPE / H production lines HYGIENIC SERIES

inserts		page:
CD	40 poles + ⊕	70
CDD	72 poles + ⊕	79
CDS	27 poles + ⊕	-
CDSH	27 poles + ⊕	88
CNE	16 poles + ⊕	112
CSE	16 poles + ⊕	-
CSH	16 poles + ⊕	112
CSH S	16 poles + ⊕	124
CCE	16 poles + ⊕	132
CMSH, CMCE	6+2 (aux) poles + ⊕	138 - 139
CSS	16 poles + ⊕	150
CT, CTSE (16A) *)	16 poles + ⊕	162
CQE	32 poles + ⊕	170
CQEE	40 poles + ⊕	176
CP	6 poles + ⊕	178
CX	6/12, 6/36 and 12/2 poles + ⊕	197 - 199
CX	4/0 and 4/2 poles + ⊕	200 - 201
MIXO	4 modules	262 - 317

*) only for standard insulating version THIH

housings with double lever HNBR gasket




hoods with double lever, top entry covers, HNBR gasket



description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic levers	THIH 16			
surface mounting housing, thermoplastic levers, high construction	TAPH 16.32	32		
surface mounting housing, thermoplastic levers, high construction	TAPH 16.40	40		
with thermoplastic levers and gasket, high construction			TAVH 16 G32	32
with thermoplastic levers and gasket, high construction			TAVH 16 G40	40
cover with 2 thermoplastic levers and gasket				THCH 16 G

panel cut-out for bulkhead mounting housings

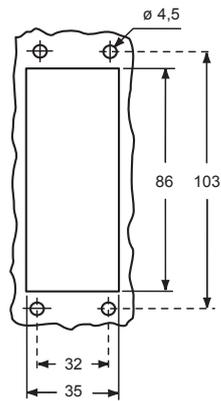

TMAO
Hoods
(page 484)




TMAV
Hoods
(page 484)


TCHC
TCHC S
Covers
with eyelet
(page 485)



THIH




TAPH

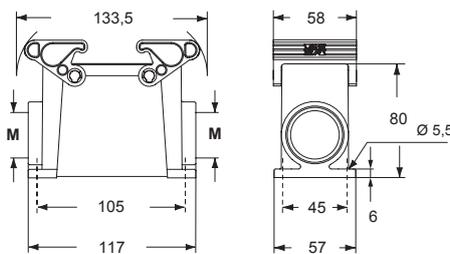


The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).


TAVH G

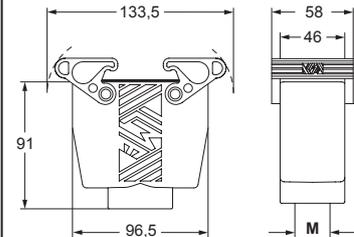

THCH G

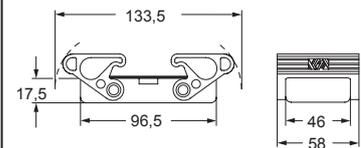

For fixing on hoods



CAVUS® Type 12



ambient temperature limits -40 °C / +70 °C