

# T-TYPE insulating STANDARD APPLICATIONS

inserts		page:
CD	64 poles + ⊕	72
CDD	108 poles + ⊕	81
CDS	42 poles + ⊕	-
CDSH	42 poles + ⊕	89
CNE	24 poles + ⊕	113
CSE	24 poles + ⊕	-
CSH	24 poles + ⊕	113
CSH S	24 poles + ⊕	125
CCE	24 poles + ⊕	133
CMSH	10+2 (aux) poles + ⊕	140
CMCE	10+2 (aux) poles + ⊕	141
CSS	24 poles + ⊕	151
CT, CTSE (16A) *)	24 poles + ⊕	163
CQE	46 poles + ⊕	171
CQEE	64 poles + ⊕	177
CX	4/8 and 6/6 poles + ⊕	204, 206
MIXO	6 modules	262 - 317

\*) only for standard insulating version TCHI

## housings with double lever




## hoods with 4 pegs




description	part No.	entry M	part No.	entry M
bulkhead mounting housing with thermoplastic levers	<b>TCHI 24</b>			
surface mounting housing, thermoplastic levers, high construction	<b>TMAP 24.32</b>	32		
surface mounting housing, thermoplastic levers, high construction	<b>TMAP 24.40</b>	40		
with pegs, side entry, high construction			<b>TMAO 24.32</b>	32
with pegs, side entry, high construction			<b>TMAO 24.40</b>	40
with pegs, top entry, high construction			<b>TMAV 24.32</b>	32
with pegs, top entry, high construction			<b>TMAV 24.40</b>	40


### panel cut-out for bulkhead mounting housings

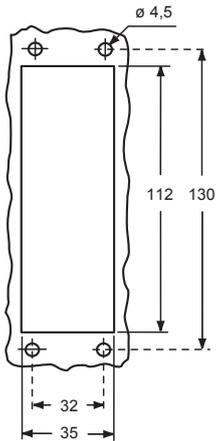

### TCHI

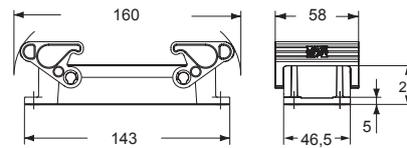


### TMAP

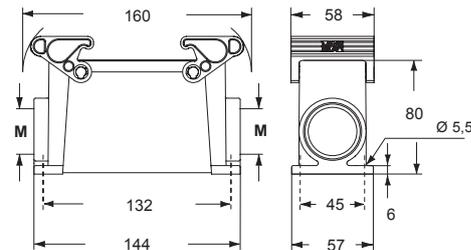


The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

### TMAO

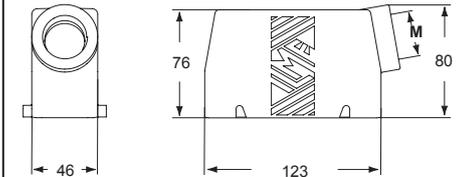

### TMAV

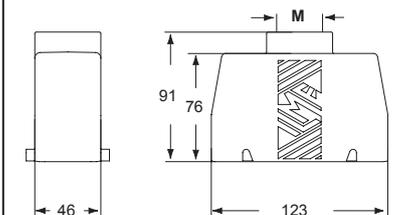

**CAIUS** Type 12



ambient temperature limits -40 °C / +90 °C

T-TYPE STANDARD