

# T-TYPE insulating STANDARD APPLICATIONS

inserts		page:
CDD	42 poles + ⊕	78
CDS	18 poles + ⊕	-
CDSH	18 poles + ⊕	87
CNE	10 poles + ⊕	111
CSE	10 poles + ⊕	-
CSH	10 poles + ⊕	111
CSH S	10 poles + ⊕	123
CCE	10 poles + ⊕	131
CMSH	3+2 (aux) poles + ⊕	136
CMCE	3+2 (aux) poles + ⊕	137
CSS	10 poles + ⊕	149
CT, CTSE (16A) *)	10 poles + ⊕	161
CQE	18 poles + ⊕	169
CX	8/24 poles + ⊕	194
MIXO	3 modules	262 - 317

\*) only for standard insulating version TCHI

## housings with double lever




## hoods with 4 pegs




description	part No.	entry M	part No.	entry M
bulkhead mounting housing with thermoplastic levers	<b>TCHI 10</b>			
surface mounting housing, thermoplastic levers, high construction	<b>TMAP 10.25</b>	25		
surface mounting housing, thermoplastic levers, high construction	<b>TMAP 10.32</b>	32		
with pegs, side entry, high construction			<b>TMAO 10.25</b>	25
with pegs, side entry, high construction			<b>TMAO 10.32</b>	32
with pegs, top entry, high construction			<b>TMAV 10.25</b>	25
with pegs, top entry, high construction			<b>TMAV 10.32</b>	32


### panel cut-out for bulkhead mounting housings




### TCHI

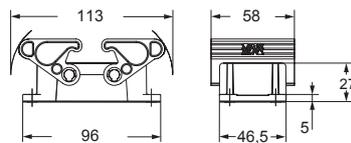


### TMAP

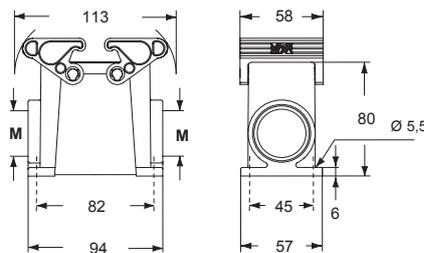

### TMAO

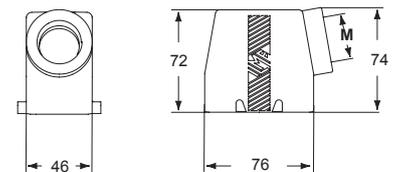

### TMAV



The surface mounting, high construction housings are supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).

**CAIUS** Type 12



ambient temperature limits -40 °C / +90 °C

T-TYPE STANDARD