
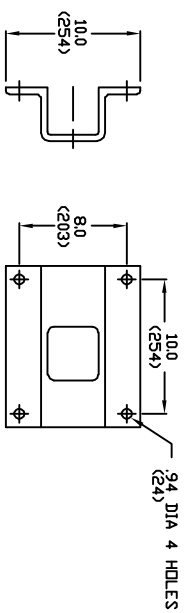


Post	P250080S0030	1
Suspension	S025116S000A	1
Anchor Shackle	AS-50	2
Part Number	Qty	

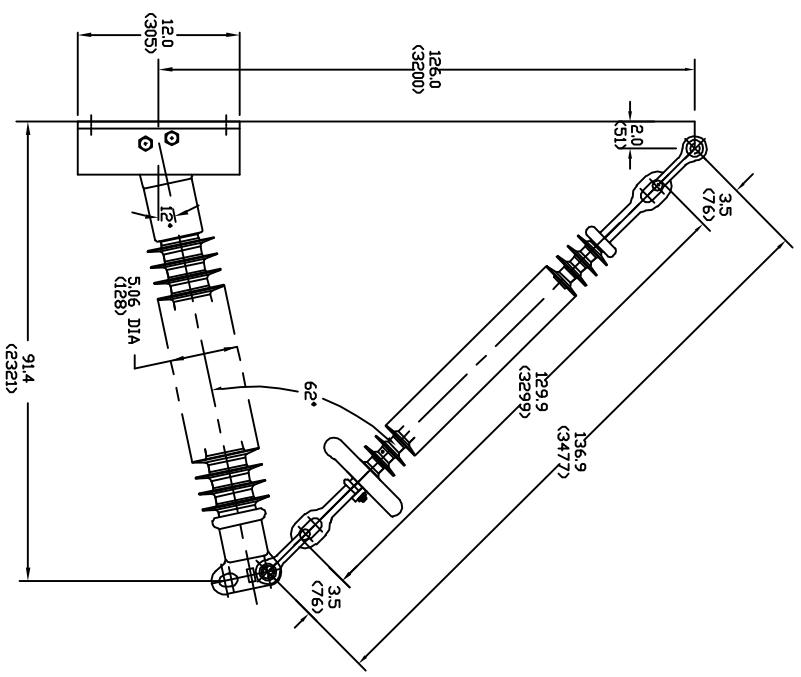

MOUNTING BASE DETAIL

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH ANSI C29.11-1988

DRY 60 HZ FLASHOVER	795
WET 60 HZ FLASHOVER	670
IMPULSE POSITIVE FLASHOVER	1220
IMPULSE NEGATIVE FLASHOVER	1320

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH IEC-60383

WET 60 HZ 1-MIN WITHSTAND	500
IMPULSE POSITIVE WITHSTAND	1095
IMPULSE NEGATIVE WITHSTAND	1185

MAX WORKING LOADS, LBS(KN)

VERTICAL	1160 (50)
TRANSVERSE TENSION	7500 (33.3)
COMPRESSION	7500 (33.3)
LONGITUDINAL	930 (4.1)
LEAKAGE DISTANCE	208
STRIKE DISTANCE	79

REV DATE 03/31/08

HUBBELL POWER SYSTEMS

QUADRI SIL BRACED
LINE POST ASSY

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE INFORMATION IS TO BE USED ONLY FOR THE PURPOSES OF THE PROJECT AND NOT FOR REPRODUCTION OR DISTRIBUTION OF COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. UNPUBLISHED HUBBELL POWER SYSTEMS. ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

DO NOT SCALE THIS DRAWING

SIZE DWG NO. CAT / PART / ASSY NO. REV

B --- BLP080F12000 1

DRN BY JVR DATE 03/24/08 SHEET 1 OF 1