

MOUNTING BASE DETAIL

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH ANSI C29.11-1988


DRY 60 HZ FLASHOVER	580
WET 60 HZ FLASHOVER	510
IMPULSE POSITIVE FLASHOVER	900
IMPULSE NEGATIVE FLASHOVER	1005

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH IEC-60383

WET 60 HZ 1-MIN WITHSTAND	380
IMPULSE POSITIVE WITHSTAND	810
IMPULSE NEGATIVE WITHSTAND	900

MAX WORKING LOADS, LBS(KN)

VERTICAL	11240 (49.9)
TRANSVERSE TENSION	7500 (33.3)
COMPRESSION	7500 (33.3)
LONGITUDINAL	1250 (5.5)
LEAKAGE DISTANCE	151
STRIKE DISTANCE	58.8

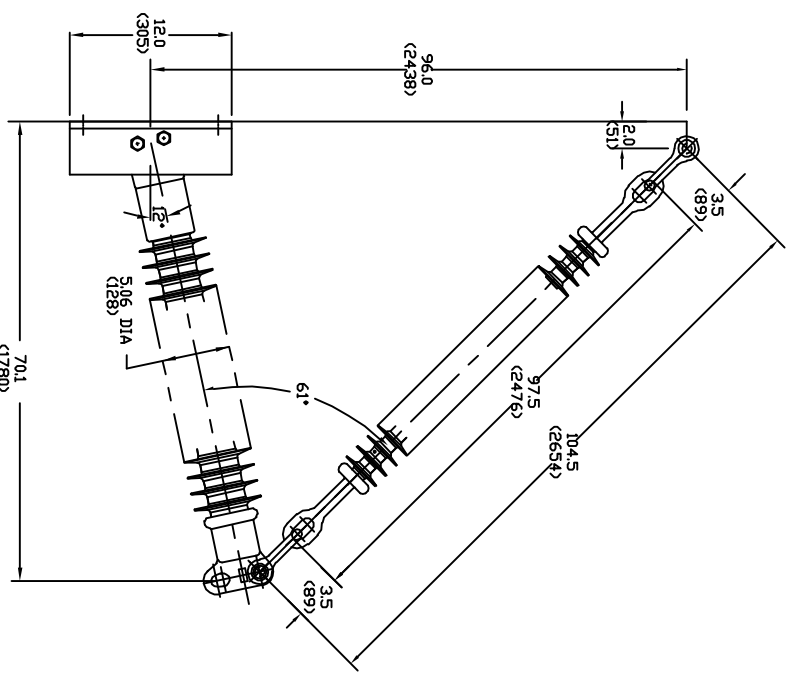

Post	P250058S0030	1
Suspension	S025084S0000	1
Anchor Shackle	AS-50	2
Part Number	Qty	

REV DATE 03/31/08

HUBBELL POWER SYSTEMS

QUADRI SIL BRACED
LINE POST ASSY

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE PROPERTY OF HUBBELL POWER SYSTEMS. NO REPRODUCTION OR DISTRIBUTION OF THIS DRAWING OR ITS CONTENTS MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

DO NOT SCALE THIS DRAWING

DATE 03/26/08

SHEET 1 OF 1