

MOUNTING BASE DETAIL

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH ANSI C29.11-1988


Dry 60 Hz Flashover	795
Wet 60 Hz Flashover	670
Impulse Positive F/D	1190
Impulse Negative F/D	1290

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH IEC-383

Wet 60 Hz 1-min Withstand	500
Impulse Positive V/S	1070
Impulse Negative V/S	1160

MAX WORKING LOADS, LBS(KN)

Vertical	11280 (501)
Transverse Tension	7500 (33.3)
Compression	7500 (33.3)
Longitudinal	930 (4.1)
Leakage Distance	280
Strike Distance	771

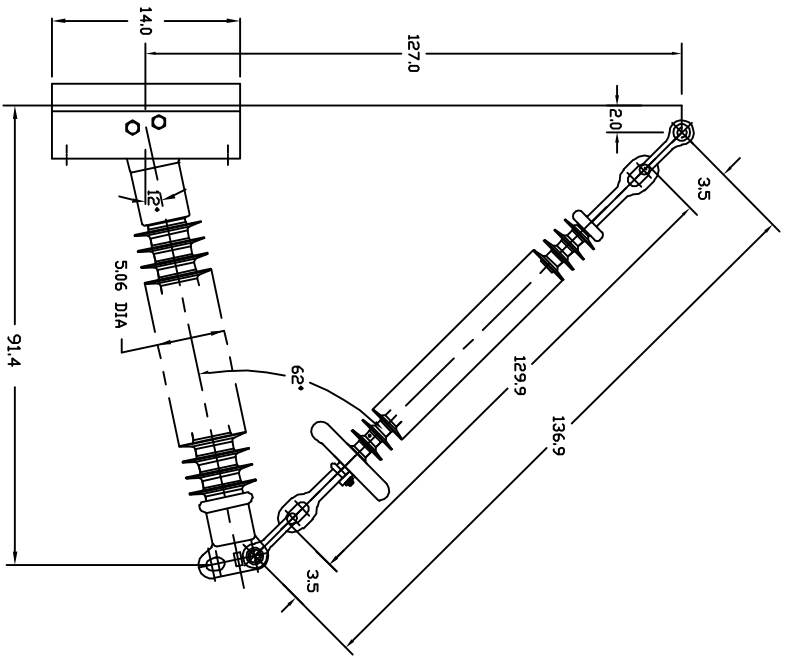

Part Number	Qty
Post	1
Suspension	1
Anchor Shackle	2

REV DATE 06/19/09

**HUBBELL POWER SYSTEMS**

QUADRI SIL BRACED LINE POST ASSY

SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
B	---	BLP80G12000	1

DO NOT SCALE THIS DRAWING

DRN BY JVR DATE 03/24/08 SHEET 1 OF 1

CONFIRMATION: THE DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE POWER SYSTEMS, NO PATENT, COPYRIGHT, OR OTHER RIGHTS IN ANY HUBBELL POWER SYSTEMS, UNLESS SHOWN OTHERWISE, ARE RESERVED UNDER THE COPYRIGHT LAWS.