

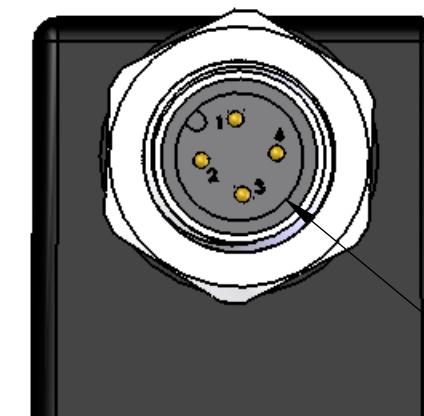


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	7/5/2012	BEM

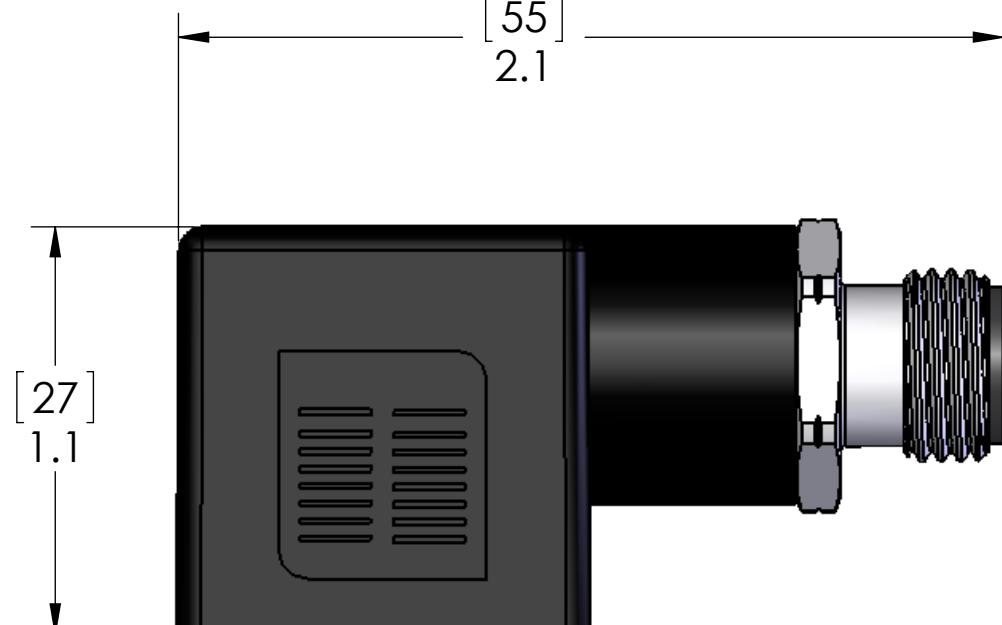

ORIENTATION OF M12 CONNECTOR IS RANDOM

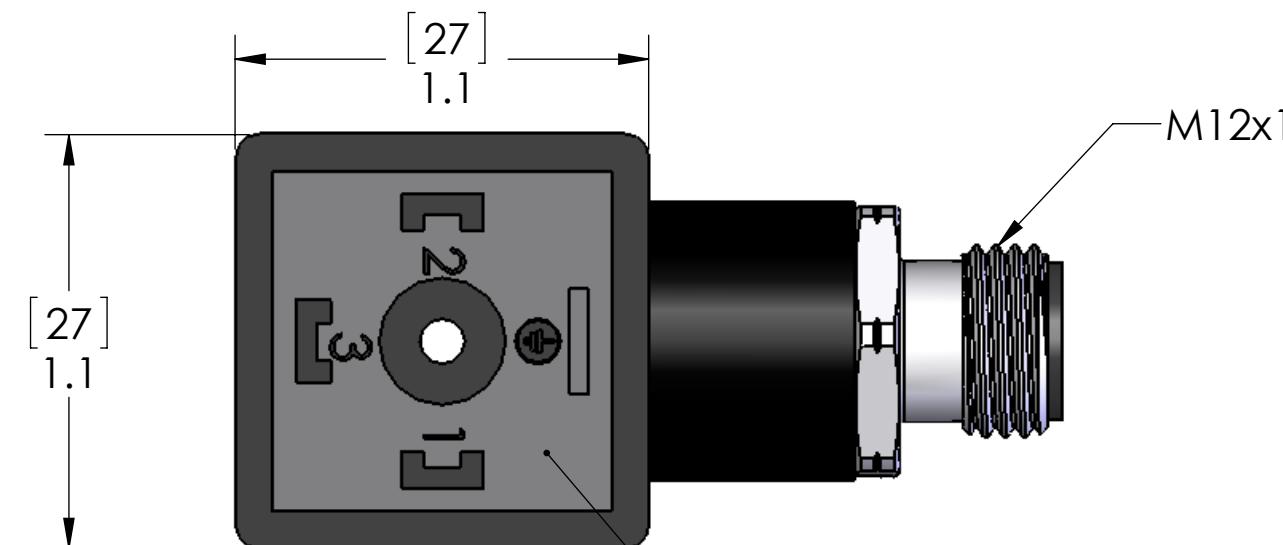

FORMED GASKED AND SCREW INCLUDED BUT NOT SHOWN FOR CLARITY

ORIENTATION OF PINPLATE AS SHOWN

SPECIFICATIONS	
DIN SPECS:	
BODY:	BLACK POLYAMIDE
CONTACT:	SILVER PLATED COPPER ALLOY
GASKET:	THERMOPLASTIC
SCREW:	STEEL ZINC PLATE
M12 SPECS:	
BODY:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
TEMP:	-40°C TO +105°C
PROTECTION:	IP65
AMPERAGE:	4A max
VOLTAGE:	250V max

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	NAME
DIMENSIONS ARE IN INCHES & [MM]	DRAWN DCT
	CHECKED
	ENG APPR.
	MFG APPR.
	Q.A.
MATERIAL	COMMENTS:
FINISH	
	DO NOT SCALE DRAWING

WIRING	
DIN	M12
1	BLACK 4
2	BLUE 3
3	NOT USED NOT USED
GND	NOT USED NOT USED

MENCOM CORPORATION

A

SIZE	DWG. NO.	REV
B	VAN-029-3401	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1