


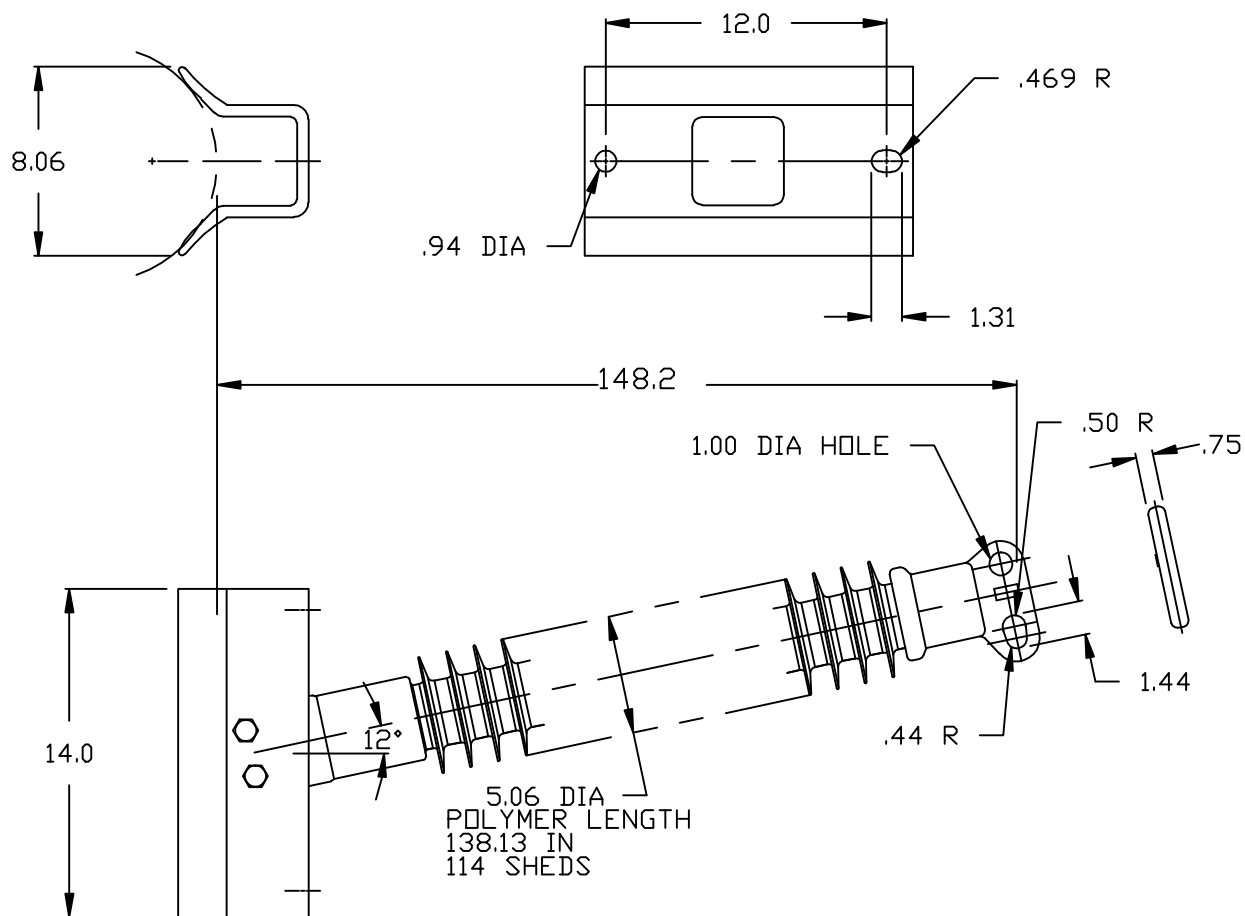

STRIKE DISTANCE _____ 138 IN
 LEAKAGE DISTANCE _____ 360 IN
 SCL _____ 1100 LB (4.9 kN)
 RCL _____ 550 LB (2.4 kN)
 DRY 60 HZ FLASHOVER _____ 1315 kV
 WET 60 HZ FLASHOVER _____ 1020 kV
 WET 60 HZ WITHSTAND _____ 865 kV
 IMPULSE CRITICAL POSITIVE _____ 2165 kV
 IMPULSE WITHSTAND POSITIVE _____ 2055 kV
 IMPULSE CRITICAL NEGATIVE _____ 2240 kV
 IMPULSE WITHSTAND NEGATIVE _____ 2125 kV
 WEIGHT _____ 83 LB

ELECTRICAL CHARACTERISTICS IN
ACCORDANCE WITH ANSI C29.1-1988

FLOOD WASHABLE
SILICONE RUBBER HOUSING

Program Revision

REV DATE 03/23/18

CONFIDENTIAL: THIS DRAWING AND ITS
 CONTENTS ARE CONFIDENTIAL AND THE
 EXCLUSIVE PROPERTY OF HUBBELL
 POWER SYSTEMS. NO PUBLICATION,
 DISTRIBUTION OR COPIES MAY BE MADE
 WITHOUT THE WRITTEN CONSENT OF
 HUBBELL POWER SYSTEMS.
 HUBBELL POWER SYSTEMS UNPUBLISHED
 ALL RIGHTS RESERVED UNDER THE
 COPYRIGHT LAWS.



HUBBELL® POWER SYSTEMS

TITLE

QUADRI*SIL LINE
POST SERIES 250

SIZE

S

DWG NO.

ER_250-QP

CAT / PART / ASSY NO.

P250138S0020

REV

11

DO NOT SCALE
THIS DRAWING

DRN BY NON

DATE 08/27/07

SHEET 1 OF 1