

MOUNTING BASE DETAIL

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH ANSI C29.11-1989


DRY 60 HZ FLASHOVER	370
WET 60 HZ FLASHOVER	355
IMPULSE POSITIVE FLASHOVER	575
IMPULSE NEGATIVE FLASHOVER	625

ELECTRICAL CHARACTERISTICS IN ACCORDANCE WITH IEC-60383

WET 60 HZ 1-MIN WITHSTAND	265
IMPULSE POSITIVE WITHSTAND	515
IMPULSE NEGATIVE WITHSTAND	560

MAX WORKING LOADS, LBS(KN)

VERTICAL	10140 (45)
TRANSVERSE TENSION	7500 (33.3)
COMPRESSION	7500 (33.3)
LONGITUDINAL	7500 (33.3)
LEAKAGE DISTANCE	99
STRIKE DISTANCE	381

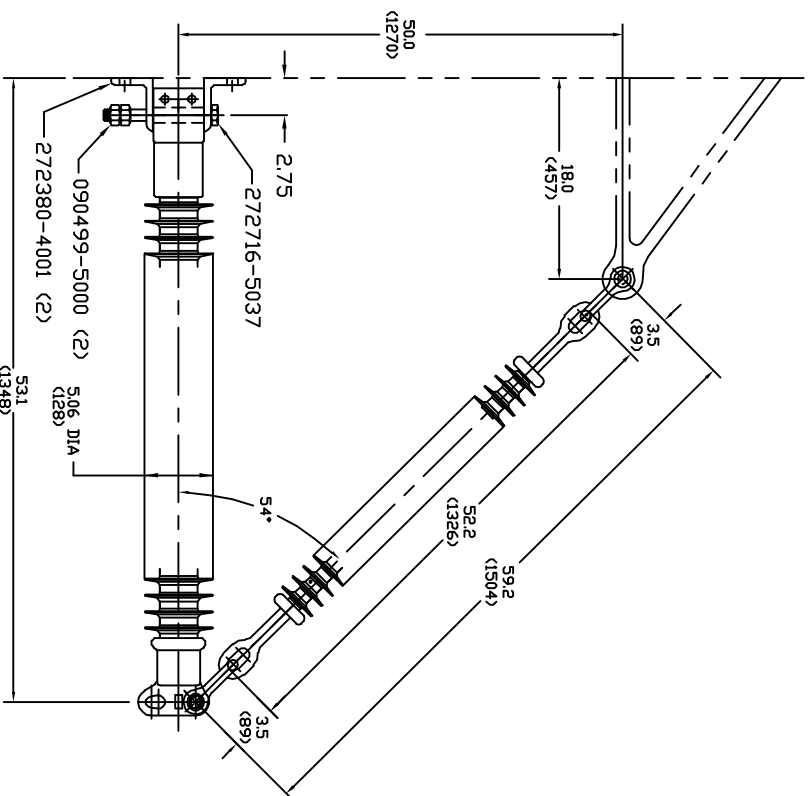

Post	P250041S0390	1
Suspension	S025043S0000	1
Anchor Shackle	AS-50	2
Part Number	Qty	

REV DATE 02/04/10

CONFIDENTIAL THE DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE POWER SYSTEMS, NO PUBLICATION, REPRODUCTION OR DISSEMINATION OF THIS DRAWING OR ITS CONTENTS MAY BE MADE WITHOUT THE WRITTEN PERMISSION OF HUBBELL POWER SYSTEMS. UNAUTHORIZED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

HUBBELL POWER SYSTEMS

TITLE

QUADRI SIL BRACED

LINE POST ASSY

SIZE DWG NO. CAT / PART / ASSY NO. REV

B --- BLP041P00000 1

DO NOT SCALE THIS DRAWING

DWG BY JVR DATE 03/31/08 SHEET 1 OF 1