



Contact module with 1 contact element, 1 NC, screw-type terminal, for floor mounting. Minimum order quantity 5 or a multiple thereof

|                                                       |                                                                                            |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------|
| <b>product brand name</b>                             | SIRIUS ACT                                                                                 |
| <b>product designation</b>                            | Contact module                                                                             |
| <b>product type designation</b>                       | 3SU1                                                                                       |
| <b>General technical data</b>                         |                                                                                            |
| product function positive opening                     | Yes                                                                                        |
| insulation voltage rated value                        | 500 V                                                                                      |
| <b>degree of pollution</b>                            | 3                                                                                          |
| <b>type of voltage</b>                                |                                                                                            |
| • of the operating voltage                            | AC/DC                                                                                      |
| • of the input voltage                                | AC/DC                                                                                      |
| <b>surge voltage resistance rated value</b>           | 6 kV                                                                                       |
| protection class IP                                   |                                                                                            |
| • of the enclosure                                    | IP40                                                                                       |
| • of the terminal                                     | IP20                                                                                       |
| <b>shock resistance</b>                               |                                                                                            |
| • acc. to IEC 60068-2-27                              | Sinusoidal half-wave 50g / 11 ms                                                           |
| • for railway applications acc. to DIN EN 61373       | Category 1, Class B                                                                        |
| <b>vibration resistance</b>                           |                                                                                            |
| • acc. to IEC 60068-2-6                               | 10 ... 500 Hz: 5g                                                                          |
| • for railway applications acc. to DIN EN 61373       | Category 1, Class B                                                                        |
| <b>operating frequency maximum</b>                    | 3 600 1/h                                                                                  |
| mechanical service life (operating cycles) typical    | 10 000 000                                                                                 |
| electrical endurance (switching cycles) typical       | 10 000 000                                                                                 |
| <b>thermal current</b>                                | 10 A                                                                                       |
| <b>reference code acc. to IEC 81346-2</b>             | S                                                                                          |
| <b>continuous current of the C characteristic MCB</b> | 10 A                                                                                       |
| Substance Prohibitance (Date)                         | 01.10.2014 00:00:00                                                                        |
| <b>operating voltage</b>                              |                                                                                            |
| • at AC                                               |                                                                                            |
| — at 50 Hz rated value                                | 5 ... 500 V                                                                                |
| — at 60 Hz rated value                                | 5 ... 500 V                                                                                |
| • at DC rated value                                   | 5 ... 500 V                                                                                |
| <b>Power Electronics</b>                              |                                                                                            |
| <b>contact reliability</b>                            | One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA) |
| <b>Auxiliary circuit</b>                              |                                                                                            |
| <b>design of the contact of auxiliary contacts</b>    | Silver alloy                                                                               |
| <b>number of NC contacts for auxiliary contacts</b>   | 1                                                                                          |

|                                                           |                                                                                                                             |
|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| • lagging switching                                       | 0                                                                                                                           |
| <b>number of NO contacts for auxiliary contacts</b>       | 0                                                                                                                           |
| • leading contact                                         | 0                                                                                                                           |
| <b>operational current at AC-12</b>                       |                                                                                                                             |
| • at 24 V rated value                                     | 10 A                                                                                                                        |
| • at 48 V rated value                                     | 10 A                                                                                                                        |
| • at 110 V rated value                                    | 10 A                                                                                                                        |
| • at 230 V rated value                                    | 8 A                                                                                                                         |
| • at 400 V rated value                                    | 8 A                                                                                                                         |
| <b>operational current at AC-15</b>                       |                                                                                                                             |
| • at 24 V rated value                                     | 6 A                                                                                                                         |
| • at 48 V rated value                                     | 6 A                                                                                                                         |
| • at 110 V rated value                                    | 6 A                                                                                                                         |
| • at 230 V rated value                                    | 6 A                                                                                                                         |
| • at 400 V rated value                                    | 3 A                                                                                                                         |
| • at 500 V rated value                                    | 1.4 A                                                                                                                       |
| <b>operational current at DC-12</b>                       |                                                                                                                             |
| • at 24 V rated value                                     | 10 A                                                                                                                        |
| • at 48 V rated value                                     | 5 A                                                                                                                         |
| • at 110 V rated value                                    | 2.5 A                                                                                                                       |
| • at 230 V rated value                                    | 1 A                                                                                                                         |
| • at 400 V rated value                                    | 0.3 A                                                                                                                       |
| • at 500 V rated value                                    | 0.3 A                                                                                                                       |
| <b>operational current at DC-13</b>                       |                                                                                                                             |
| • at 24 V rated value                                     | 3 A                                                                                                                         |
| • at 48 V rated value                                     | 1.5 A                                                                                                                       |
| • at 110 V rated value                                    | 0.7 A                                                                                                                       |
| • at 230 V rated value                                    | 0.3 A                                                                                                                       |
| • at 400 V rated value                                    | 0.1 A                                                                                                                       |
| • at 500 V rated value                                    | 0.1 A                                                                                                                       |
| <b>Connections/ Terminals</b>                             |                                                                                                                             |
| <b>type of electrical connection</b>                      | screw-type terminals                                                                                                        |
| <b>type of connectable conductor cross-sections</b>       |                                                                                                                             |
| • solid with core end processing                          | 2x (0.5 ... 0.75 mm <sup>2</sup> )                                                                                          |
| • solid without core end processing                       | 2x (1.0 ... 1.5 mm <sup>2</sup> )                                                                                           |
| • finely stranded with core end processing                | 2x (0.5 ... 1.5 mm <sup>2</sup> )                                                                                           |
| • finely stranded without core end processing             | 2x (1.0 ... 1.5 mm <sup>2</sup> )                                                                                           |
| • at AWG cables                                           | 2x (18 ... 14)                                                                                                              |
| tightening torque with screw-type terminals               | 0.8 ... 0.9 N·m                                                                                                             |
| <b>Ambient conditions</b>                                 |                                                                                                                             |
| <b>ambient temperature</b>                                |                                                                                                                             |
| • during operation                                        | -25 ... +70 °C                                                                                                              |
| • during storage                                          | -40 ... +80 °C                                                                                                              |
| environmental category during operation acc. to IEC 60721 | 3M6, 3S2, 3B2, 3C3 (without salt spray), 3K6 (with relative humidity of 10 ... 95%, no condensation in operation permitted) |
| <b>Installation/ mounting/ dimensions</b>                 |                                                                                                                             |
| <b>fastening method</b>                                   | floor mounting                                                                                                              |
| • of modules and accessories                              | Floor mounting                                                                                                              |
| <b>height</b>                                             | 33.2 mm                                                                                                                     |
| <b>width</b>                                              | 9.8 mm                                                                                                                      |
| <b>depth</b>                                              | 27.7 mm                                                                                                                     |
| <b>Certificates/ approvals</b>                            |                                                                                                                             |
| <b>General Product Approval</b>                           |                                                                                                                             |



[KC](#)



| Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------|-------------------|-------------------|
|---------------------------|-------------------|-------------------|

[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



| Marine / Shipping | other |
|-------------------|-------|
|-------------------|-------|



[Confirmation](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1400-2AA10-1CA0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1400-2AA10-1CA0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1400-2AA10-1CA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1400-2AA10-1CA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1400-2AA10-1CA0&lang=en)

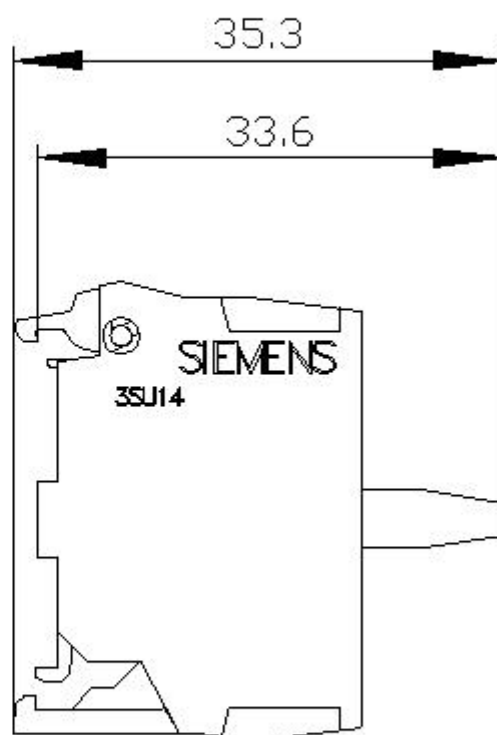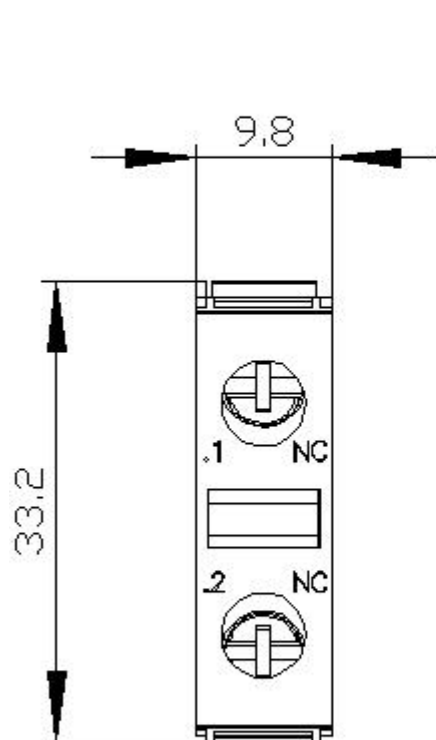

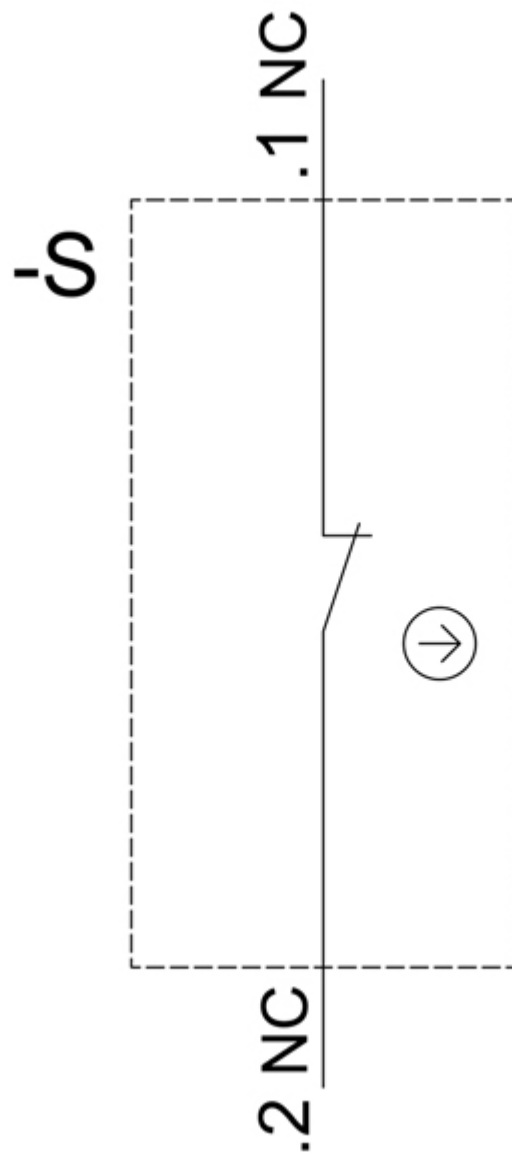

last modified:

12/18/2020 