


SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON			
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD			
HOUSING MATERIAL	NYLON			
COUPLING NUT MATERIAL	BRASS			
RATED CURRENT [A]	3.0 A			
RATED VOLTAGE [V]	60 V AC/DC			
TEMPERATURE RANGE	-40° C to +85° C			
PROTECTION CLASS	MEETS IEC IP67			
CABLE GLAND	PG 9 - ACCEPTS 6-8mm CABLE			
TERMINATION TYPE	SOLDER CUP			

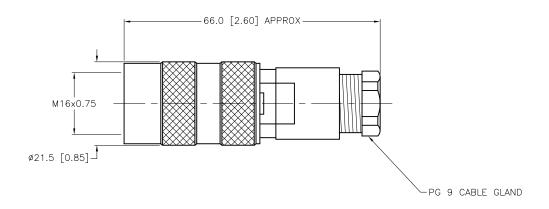

SOURCE DRAWING - FOR REFERENCE ONLY

Source drawing if on the energy of						
	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. High Technolo	RCK NAC MIII gy Sensors and Automation Controls	3000 CAMPUS DRIVE NNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT RDS DATE 04/08/1	BK 7-0		
B DRAWING PROCESSED AS PART OF ECO 39020 KMY 06/07/	FINISH	CONTACT TURCK FOR MORE	MILLIMETER [INCH]	IDENTIFICATION NO. U2-0286	5 REV	
B DRAWING PROCESSED AS PART OF ECO 39020 KMY 06/07/ REV DESCRIPTION BY DATE	12 39020 SEE SPECIFICATIONS ECO NO.	INFORMATION	DO NOT SCALE THIS DRAWING	FILE: U2-02865	SHEET 1 OF 1	