




MALE END VIEW




SPECIFICATIONS

CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
MAXIMUM WIRE SIZE	20 AWG
CABLE GRIP RANGE	4-6mm
TEMPERATURE RATING	-40°C to +85°C (-40°F to +185°F)
PROTECTION CLASS	IEC IP67
WIRE TERMINATION	SCREW TERMINAL

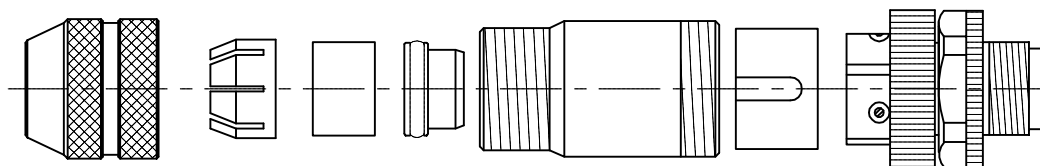

EXPLODED VIEW

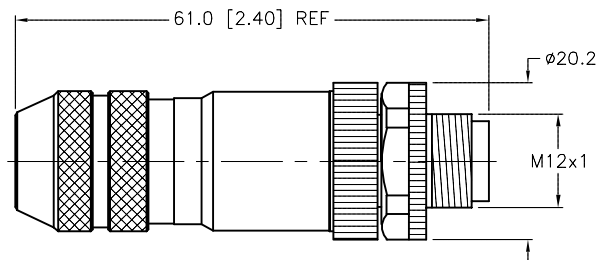


ASSEMBLED VIEW

NOTES:

1. ALL METAL SHIELDED FIELD WIREABLE CONNECTOR.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. NOTE 2. PRELIMINARY 3. SPECIFICATIONS 4.									
MATERIAL		DRFT RDS		DATE 01/03/11		DESCRIPTION CMBSD 8141-0			
SEE SPECIFICATIONS		APVD		SCALE 1=1.0					
		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-18483		REV P2			
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DO NOT SCALE THIS DRAWING		FILE: U2-18483		SHEET 1 OF 1	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION							