


BLU,PVC,1STPDX18+1X18,ITCERDB,MS40 Instrumentation Tray/Exposed Run/Direct Burial Cable – Reelfast™ Bulk Cable



Features

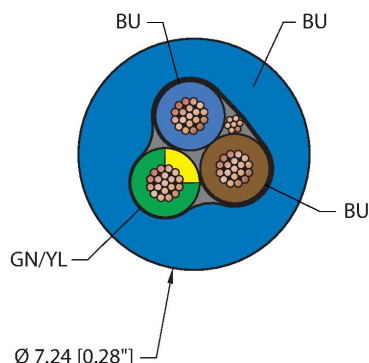

- Shielded Twisted Pair
- ITC 150V
- PLTC 300V
- 1309 MSB 600V
- CIC/TC 600V
- Instrumentation Tray/Exposed Run/Direct Burial Cable
- Blue PVC jacket, 1STPDX18+1X18 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, IEEE 1202 FT4, CSA FT1, CSA FT4, IEC 60332-3-22

Technical data

Type	BLU,PVC,1STPDX18+1X18,ITCERDB,MS40
ID no.	RF51335

Cable data	
Cable Platform	Instrumentation Tray/Exposed Run/Direct Burial Cable
Total number of conductors	3
Cable diameter	Ø 7.24 mm
Cable jacket	PVC, Blue
Conductor diameter	0.086 "
Conductor material	TC (tinned copper)
Conductor insulation material	PVC/Nylon (Nylon overcoat)
Conductor size	1 x 18 AWG [Similar to 0.75 mm ²]
Number of strands x O.D.	19 x 0.0092 "
Conductor colors	GN/YL, BU, BN
Description of assembly	STPD (Shielded Twisted Pair, Drain)
Number of assemblies	1
Conductor diameter	0.086 "
Conductor insulation material	PVC/N
Assembly drain	20 AWG, TC (Tinned Copper)
Assembly foil	Aluminum/polyester (IN)
Cable conductor cross-section	2x18 AWG [Similar to 0.75 mm ²]
Number of strands x O.D.	19x0.0092 "
Weight	0.184 lbs. /meter

Technical data

Electrical properties at +20 °C	
Voltage	ITC 150V PLTC 300V 1309 MSB 600V CIC/TC 600V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	7.06 Ω/1000ft max.
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 15 x Ø
Cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+105 °C
Ambient temperature range (dynamic)	-40 °C...+105 °C
Temperature range (installation)	-20 °C...+105 °C
Approval	
UL Approvals	UL 1309 Marine Shipboard UL 2250 ITC UL 13 PLTC Exposed Run Direct Burial Sunlight Resistant -40C Cold Bend Oil Res I
CSA Approvals	CSA C22.2 No.245 Marine Shipboard CSA C22.2 No.239 CIC & CSA C22.2 No.230 TC CSA FT1 CSA FT4 Sunlight Resistant
Additional Approvals	IEEE 1202/FT4 IEEE 1580-2010
Compliances	RoHS 2 CE IEC 60332-3-22
Marine Shipboard Approvals and Compliances	ABS
Note	
- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius. - We reserve the right to make technical alterations without prior notice.	