



FEMALE END VIEW




 Ethernet

SPECIFICATIONS	
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
MAXIMUM WIRE SIZE	18 AWG
CABLE GRIP RANGE	4–6mm
TEMPERATURE RATING	–40°C to +85°C (–40°F to +185°F)
PROTECTION CLASS	IEC IP67
WIRE TERMINATION	SCREW TERMINAL

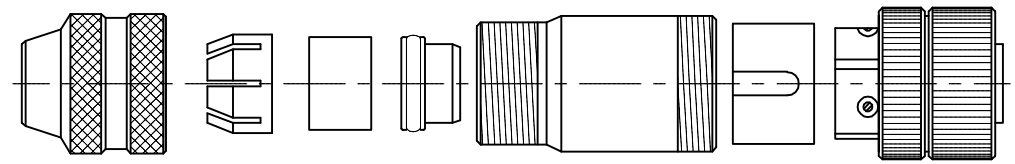

EXPLODED VIEW

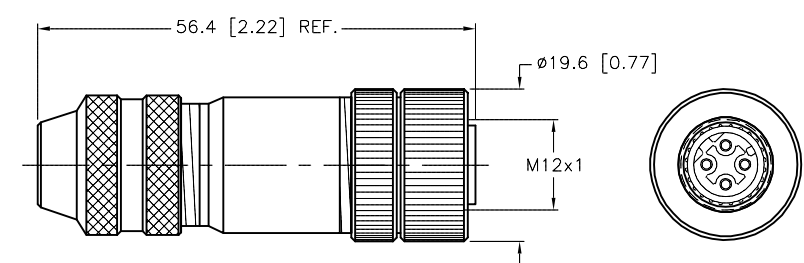


ASSEMBLED VIEW

NOTE
PRELIMINARY
SPECIFICATIONS

SOURCE DRAWING – FOR REFERENCE ONLY

ALL METAL SHIELDED FIELD WIREABLE CONNECTOR

P2	REMOVE FIFTH PIN	NF	06/19/18	65829
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.				DRFT	RDS	DATE	01/04/11
2.				APVD		SCALE	1=1.0
3.				UNIT OF MEASUREMENT			
4.				MILLIMETER [INCH]			
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DO NOT SCALE THIS DRAWING		DESCRIPTION	
SEE SPECIFICATIONS						CMBD 8141–0	
FINISH		CONTACT TURCK FOR MORE INFORMATION				IDENTIFICATION NO.	
SEE SPECIFICATIONS						U2–18485	
						REV	
						P2	
						FILE: U2–18485	
						SHEET 1 OF 1	