


RS46PT-S-0

M12 Power – Field-Wireable Connector

Male Connector M12 × 1, Straight

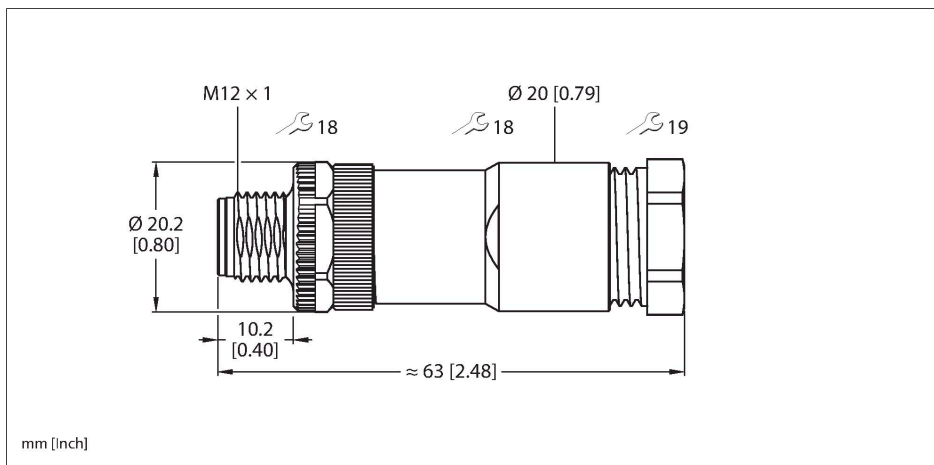


Technical data

Type	RS46PT-S-0
ID no.	U2-31186
Connector A	Male, M12 × 1, Straight, T-code
Number of Pins	4
Contacts	CuZn, Gold-plated
Contact carriers	Plastic, PA, Black
Connector body	Plastic, PA, Black
Coupling nut	Die-cast Zinc, GD-Zn, Nickel-plated
Connector seal	Plastic, FPM/FKM
Panel seal	plastic
External diameter of the cable	min. 8...10 mm
Connection mode	Screw/clamp connection
Mechanical life	> 100 Mating cycles
Protection class (When coupled)	IP67, (screwed together)
Shield	no
Electrical properties at +20 °C	
Rated voltage	63 V
Current	12 A
Mechanical and chemical properties	
Ambient temperature range (static)	-40 °C...+85 °C

Features

- T coding
- Metal retaining screw
- Screw-clamp terminal
- 4-pin
- Cable feedthrough: 8.0...10.0 mm
- Terminal capacity:
 - Max. 1.5 mm² or 16 AWG (with cable end sleeve)
 - Max. 2.5 mm² or 14 AWG (without cable end sleeve)

Contact assignment



Derating Curve

Technical data

Note	- CAUTION: RISK OF ELECTRICAL SHOCK. DO NOT DISCONNECT UNDER LOAD.
	- We reserve the right to make technical alterations without prior notice.

Derating Curve

