

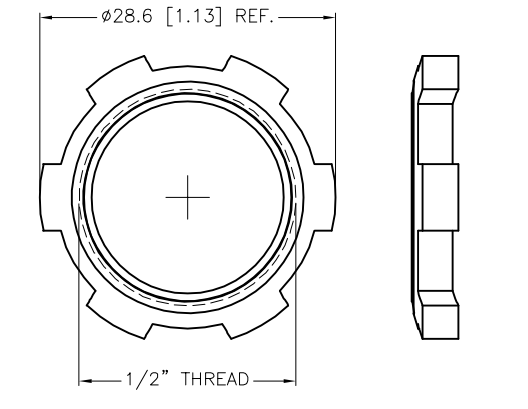


FEMALE END VIEW





LOCKNUT



SPECIFICATIONS


CONTACT CARRIER MATERIAL	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
O-RING MATERIAL	NITRILE
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
TERMINATION, SOLDER CUPS	UP TO 16 AWG MAX
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

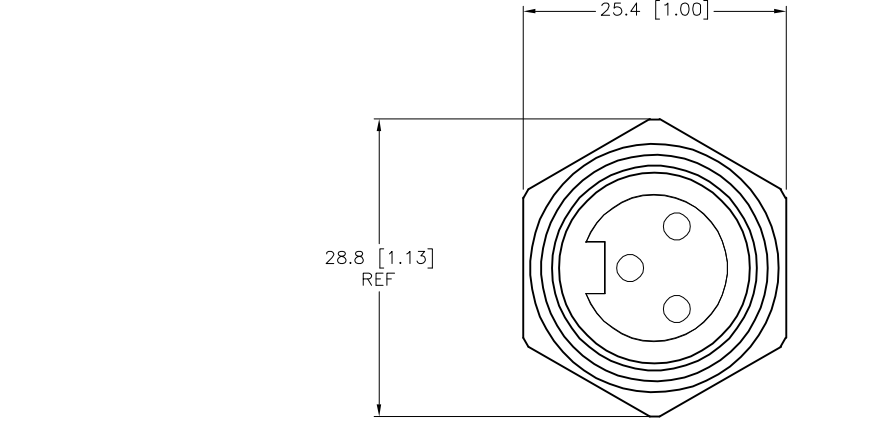

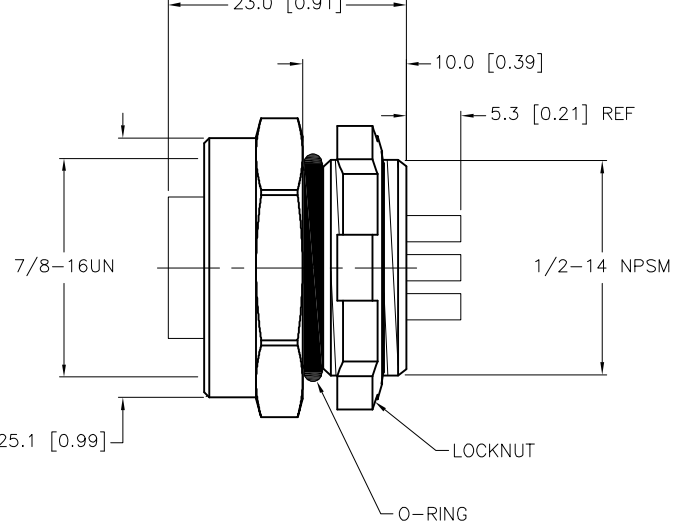

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1. "W/LN" DESIGNATES LOCKNUT INCLUDED WITH RECEPTACLE.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.			TURCK	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT RDS	DATE 11/22/11	DESCRIPTION RKFL 36 W/LN
SEE SPECIFICATIONS		APVD	SCALE 1=.8	
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-07944
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		REV A
A REV	DRAWING RELEASE PENDING DESCRIPTION	RDS BY	11/22/11 DATE	ECO NO.