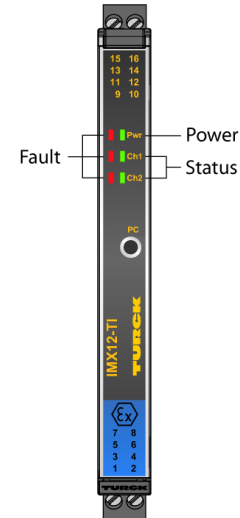
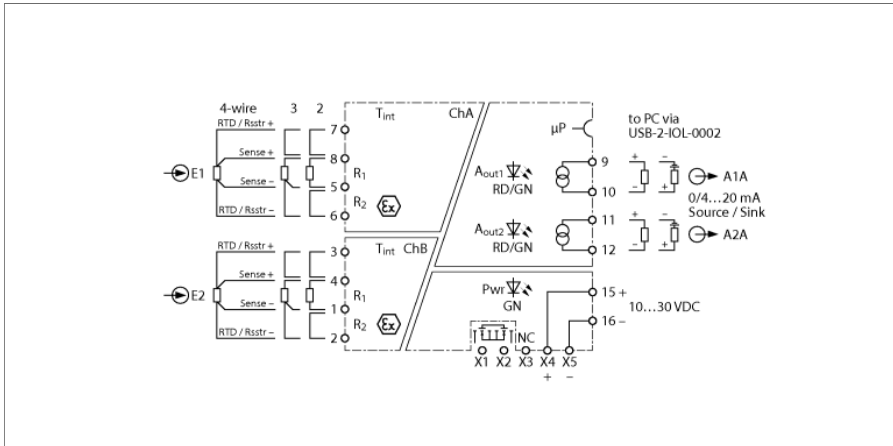


Temperature measuring amplifier 2-channel IMX12-TI01-2RTDR- 2I-CPR/24VDC



The 2-channel temperature measuring amplifier IMX12-TI01-2RTDR-2I-CPR/24VDC has inputs for: RTDs acc. to IEC 60751, DIN 43760, GOST 6651-94 (2, 3 and 4-wire) and resistors 0...5 kΩ (2, 3 and 4-wire). The device can be powered from a power bridge that also transmits a collective fault signal.

The device is configured via the PC interface. The current outputs can be set to 0/4 ... 20 mA and source or sink.

A green LED indicates operational readiness. A fault in the input circuit leads to a flashing red LED according to NE44, an internal error to a steady read LED. The fault current can be adjusted to < 3.5 mA or > 21.5 mA.

The device can be used in safety circuits up to SIL2 (high and low demand according to IEC 61508) and meets the requirements of the NE21. It is equipped with removable screw terminals.

- Input circuits monitored for wire-break and short-circuit
- Parametrized via PC
- Complete galvanic isolation
- Input reverse-polarity protected
- Removable screw terminals
- Power bridge (connector incl. in delivery)
- ATEX, IECEx, cFM, cUL, NEPSI, INMETRO, Kosha, TR CU EAC CMI
- Installation in zone 2
- SIL 2


Temperature measuring amplifier

2-channel

IMX12-TI01-2RTDR- 2I-CPR/24VDC

Type designation	IMX12-TI01-2RTDR- 2I-CPR/24VDC
Ident-No.	7580512
Nominal voltage	24 VDC
Operating voltage range	10...30 VDC
Power consumption	≤ 2.7 W
Power dissipation, typ.	≤ 1.6 W
Input circuits	RTD Type DIN EN 60751 Pt50, Pt100, Pt 500, Pt1000 RTD Type DIN EN 43760 Ni50, Ni100, Ni500, Ni1000 RTD Type Gost 6651-94 Pt50, Pt100, Pt 500, Pt1000, CU50, Cu53, Cu100, CU500, CuZn100
Output circuits	2 × source/sink (15...28 V) 0/4...20 mA Load resistance, current output ≤ 0.8 kΩ Power-Bridge common alarm output MOSFET, U _{max} = 30 V, I _{max} = 100 mA
Reference temperature	23 °C
Measuring accuracy current output (including linearity, hysteresis and repeatability)	± 10 μA
Temperature drift analog output	0.0025 %/K
Accuracy, RTD input, 0...500 ohm	± 50 mΩ
Temperature drift, RTD input, 0...500 ohm	± 5 mΩ/K
Accuracy, RTD input, 500...5000 ohm	± 500 mΩ
Temperature drift, RTD input, 500...5000 ohm	± 30 mΩ/K
Cold junction compensation error	with cold junction compensation < 2 K
Note	With 3-wire connection the errors double
Galvanic isolation	
Test voltage	2.5 kV
E1,E2-A1A,A2A	375 V peak value acc. to EN 60079-11
E1,E2 supply voltage	375 V peak value acc. to EN 60079-11
A1A supply voltage	300 V RMS acc. to EN 50178 and EN 61010-1
A2A supply voltage	300 V RMS acc. to EN 50178 and EN 61010-1
Important note	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Ex approval acc. to conformity certificate	TÜV 15 ATEX 168214 X
Application area	II (1) G, II (1) D
Ignition protection category	[Ex ia Ga] IIC; [Ex ia Da] IIIC
Application area	II 3 (1) G
Ignition protection type	Ex nA [ia Ga] IIC T4 Gc
Important note	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Use in SIL safety circuits	SIL 2 acc. to IEC 61508
Indication	
Operational readiness	green
Switching state	Yellow
Error indication	red

Dimensions



Temperature measuring amplifier



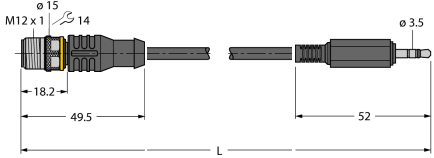


2-channel

IMX12-TI01-2RTDR- 2I-CPR/24VDC

Protection class	IP20																																																																																
Flammability class acc. to UL 94	V-0																																																																																
Ambient temperature	-25...+70 °C																																																																																
Storage temperature	-40...+80 °C																																																																																
Relative humidity	≤ 95 %																																																																																
Dimensions	120 x 12.5 x 117 mm																																																																																
Weight	170 g																																																																																
Mounting instructions	DIN rail (NS35)																																																																																
Housing material	Polycarbonate/ABS																																																																																
Electrical connection	Removable screw clamp terminals, 2-pin																																																																																
Connection variant	Power bridge with collective fault signal																																																																																
Terminal cross-section	0.2...2.5 mm ² (24 ... 13 AWG)																																																																																
Tightening torque	0.5 Nm																																																																																
Tightening torque	4.43 LBS-Inch																																																																																
Environmental conditions	<table> <tr> <td>Operating altitude</td><td>Up to 2000 m above sea level</td></tr> <tr> <td>Pollution degree</td><td>II</td></tr> <tr> <td>Surge category</td><td>II (EN 61010-1)</td></tr> <tr> <td>Standards used</td><td></td></tr> <tr> <td>Voltage resistance and insulation</td><td></td></tr> <tr> <td></td><td>EN 50178</td></tr> <tr> <td></td><td>EN 61010-1</td></tr> <tr> <td></td><td>EN 50155</td></tr> <tr> <td></td><td>GL VI-7-2</td></tr> <tr> <td>Shock</td><td></td></tr> <tr> <td></td><td>EN 61373 class B</td></tr> <tr> <td></td><td>EN 50155</td></tr> <tr> <td></td><td>GL VI-7-2</td></tr> <tr> <td></td><td>EN 60068-2-6</td></tr> <tr> <td></td><td>EN 60068-2-27</td></tr> <tr> <td>Temperature</td><td></td></tr> <tr> <td></td><td>EN 60068-2-1 Ad</td></tr> <tr> <td></td><td>EN 50155</td></tr> <tr> <td></td><td>GL VI-7-2</td></tr> <tr> <td></td><td>EN 60068-2-2 Bd</td></tr> <tr> <td></td><td>EN 60068-2-1</td></tr> <tr> <td>Humidity</td><td></td></tr> <tr> <td></td><td>EN 60068-2-38</td></tr> <tr> <td>EMC</td><td></td></tr> <tr> <td></td><td>EN 50155</td></tr> <tr> <td></td><td>GL VI-7-2</td></tr> <tr> <td></td><td>NE21</td></tr> <tr> <td></td><td>EN 61326-1</td></tr> <tr> <td></td><td>EN 61326-3-1</td></tr> <tr> <td></td><td>EN 61000-4-2</td></tr> <tr> <td></td><td>EN 61000-4-3</td></tr> <tr> <td></td><td>EN 61000-4-4</td></tr> <tr> <td></td><td>EN 61000-4-5</td></tr> <tr> <td></td><td>EN 61000-4-6</td></tr> <tr> <td></td><td>EN 61000-4-11</td></tr> <tr> <td></td><td>EN 61000-4-29</td></tr> <tr> <td></td><td>EN 55011</td></tr> <tr> <td></td><td>EN 55016</td></tr> <tr> <td></td><td>EN 50121-3-2</td></tr> <tr> <td></td><td>EN 61000-6-2</td></tr> </table>	Operating altitude	Up to 2000 m above sea level	Pollution degree	II	Surge category	II (EN 61010-1)	Standards used		Voltage resistance and insulation			EN 50178		EN 61010-1		EN 50155		GL VI-7-2	Shock			EN 61373 class B		EN 50155		GL VI-7-2		EN 60068-2-6		EN 60068-2-27	Temperature			EN 60068-2-1 Ad		EN 50155		GL VI-7-2		EN 60068-2-2 Bd		EN 60068-2-1	Humidity			EN 60068-2-38	EMC			EN 50155		GL VI-7-2		NE21		EN 61326-1		EN 61326-3-1		EN 61000-4-2		EN 61000-4-3		EN 61000-4-4		EN 61000-4-5		EN 61000-4-6		EN 61000-4-11		EN 61000-4-29		EN 55011		EN 55016		EN 50121-3-2		EN 61000-6-2
Operating altitude	Up to 2000 m above sea level																																																																																
Pollution degree	II																																																																																
Surge category	II (EN 61010-1)																																																																																
Standards used																																																																																	
Voltage resistance and insulation																																																																																	
	EN 50178																																																																																
	EN 61010-1																																																																																
	EN 50155																																																																																
	GL VI-7-2																																																																																
Shock																																																																																	
	EN 61373 class B																																																																																
	EN 50155																																																																																
	GL VI-7-2																																																																																
	EN 60068-2-6																																																																																
	EN 60068-2-27																																																																																
Temperature																																																																																	
	EN 60068-2-1 Ad																																																																																
	EN 50155																																																																																
	GL VI-7-2																																																																																
	EN 60068-2-2 Bd																																																																																
	EN 60068-2-1																																																																																
Humidity																																																																																	
	EN 60068-2-38																																																																																
EMC																																																																																	
	EN 50155																																																																																
	GL VI-7-2																																																																																
	NE21																																																																																
	EN 61326-1																																																																																
	EN 61326-3-1																																																																																
	EN 61000-4-2																																																																																
	EN 61000-4-3																																																																																
	EN 61000-4-4																																																																																
	EN 61000-4-5																																																																																
	EN 61000-4-6																																																																																
	EN 61000-4-11																																																																																
	EN 61000-4-29																																																																																
	EN 55011																																																																																
	EN 55016																																																																																
	EN 50121-3-2																																																																																
	EN 61000-6-2																																																																																




Temperature measuring amplifier
2-channel
IMX12-TI01-2RTDR- 2I-CPR/24VDC

Accessories

Type code	Ident-No.	Description	Dimension drawing
IMX12-PS02-UI-UIR-PR /24VDC	7580610	Power supply module power bridge; Collective fault signal via relay; Single and redundant power supply via terminals; Removable screw terminals	
USB-2-IOL-0002	6825482	IO-Link Master with integrated USB port	
IOL-COM/3M	7525110	The communication line IOL-PROG/3M connects IO-Link devices to an IO-Link master via a 3.5 mm jack plug.	
IMC 1.5/ 5-ST-3.81 BK	7580954	Power Bridge Connection Terminal	
MCVR 1.5/ 5-ST-3.81 BK	7580955	Power Bridge Connection Terminal	

Temperature measuring amplifier
2-channel
IMX12-TI01-2RTDR- 2I-CPR/24VDC

Accessories

Type code	Ident-No.	Description	Dimension drawing
MC 1.5/ 5-ST-3.81 BK	7580956	Power Bridge Connection Terminal	
E/ME TBUS NS35 BK	7580957	Power Bridge Connection Terminal	
IMX12-SC-2X-4BK	7580940	Screw terminals for IM(X)12 modules; included in delivery: 4 pcs. of 2-pin black terminals	
IMX12-SC-2X-4BU	7580941	Screw terminals for IM(X) 12 modules; included in delivery: 4 pcs. of 2-pin blue terminals	
IMX12-CC-2X-4BK	7580942	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. black terminals, 2-pin	
IMX12-CC-2X-4BU	7580943	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. blue terminals, 2-pin	
IMX12-2-CJT	100003646		