



Transformer Specifications	
PRIMARY VOLTAGE(S)	208/277
SECONDARY VOLTAGE(S)	120
RATED VA	500
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	17.7 LBS

TEST REQUIREMENTS	
WINDING	H3-H2-H1
DC VOLTS	208-277
LOAD VOLTS	208-277
FL. AMPS	2.772
HI-POI	4800V
EXCITING AMPS	0.40AMPS @ 277VOLTS, 50HZ
EXCITING WATTS	28.0 MAX

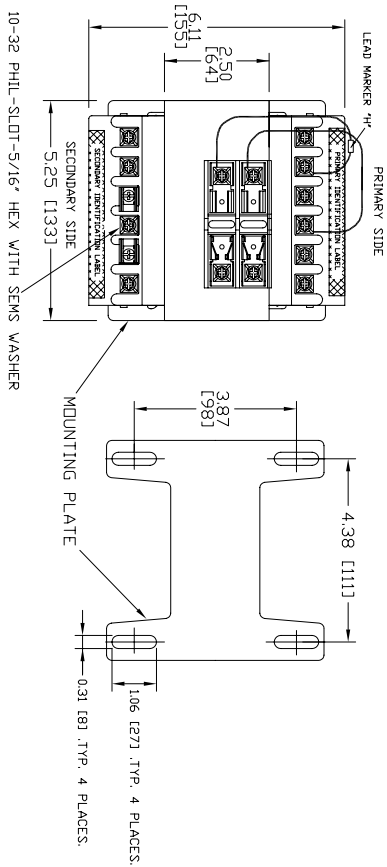


NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

MAIN PRODUCT
IDENTIFICATION LABEL

Cutler-Hammer
INDUSTRIAL CONTROL TRANSFORMER
500VA 50/60Hz
TEMP CL 130°C
CAT C0500E3AFB
SERIES 2
B500-2232-8F

UL
LISTED 102X

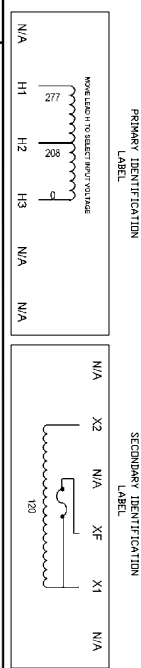

REVISION
DT----

UNLESS OTHERWISE SPECIFIED	DRATER/DESIGNER	DATE	FATON CORPORATION - CONFIDENTIAL AND PROPRIETARY	
DIMENSIONS IN INCHES	S. CASTRO	07/02/09		
ONE PLACE DEC	APPD	DATE		
TWO PLACE DEC	APPD	DATE		
THREE PLACE DEC	APPD	DATE		
ANGLES 24.6 DEG	0.5 SANDOVAL	07/02/09	INDUSTRIAL CONTROL TRANSFORMER	
VOLTAGE	ENGR REF			
AMPERAGE				
FORCE/TORQUE/SPEED				
TEMPERATURE	TOOL REF		TRANSFORMER	
DIMENSIONS TO BE INTERPRETED				
IN ACCORDANCE WITH				
ASME, Y14.5M-1994				
THIRD ANGLE PROJECTION	SCALE	PARTS LIST	C0500E3AFB	