


# E12422



## Ethernet connection cable

VSTGN040ZDS00,5L04STGN040ZDS

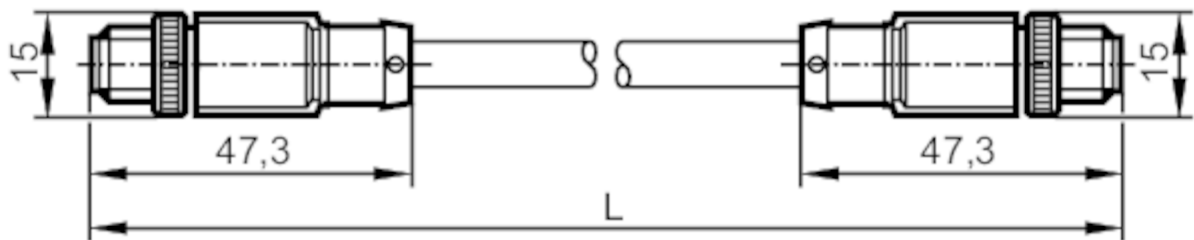

| Application                                                                                                                                                          |      |                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|--------------------------------------|
| System                                                                                                                                                               |      | gold-plated contacts; screened cable |
| Design                                                                                                                                                               |      | Ethernet cable, D-coded              |
| Electrical data                                                                                                                                                      |      |                                      |
| Operating voltage                                                                                                                                                    | [V]  | < 50 AC / < 60 DC                    |
| Protection class                                                                                                                                                     |      | III                                  |
| Max. current load total                                                                                                                                              | [A]  | 4                                    |
| Operating conditions                                                                                                                                                 |      |                                      |
| Ambient temperature                                                                                                                                                  | [°C] | -20...90                             |
| Protection                                                                                                                                                           |      | IP 67                                |
| Mechanical data                                                                                                                                                      |      |                                      |
| Weight                                                                                                                                                               | [g]  | 66.1                                 |
| Dimensions                                                                                                                                                           | [mm] | 15 x 15 x 47.3                       |
| Material                                                                                                                                                             |      | TPU (urethane)                       |
| Molded-body material                                                                                                                                                 |      | TPU (urethane)                       |
| Material nut                                                                                                                                                         |      | diecast zinc, nickel-plated          |
| Remarks                                                                                                                                                              |      |                                      |
| Pack quantity                                                                                                                                                        |      | 1 pcs.                               |
| Electrical connection - plug                                                                                                                                         |      |                                      |
| Connector: 1 x M12, straight; Moulded body: TPU (urethane); Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: shield connected |      |                                      |

# E12422



## Ethernet connection cable


VSTGN040ZDS00,5L04STGN040ZDS



### Electrical connection

Cable: 0.5 m, PVC, green, screened; 4 x 0.34 mm<sup>2</sup>

### Connection

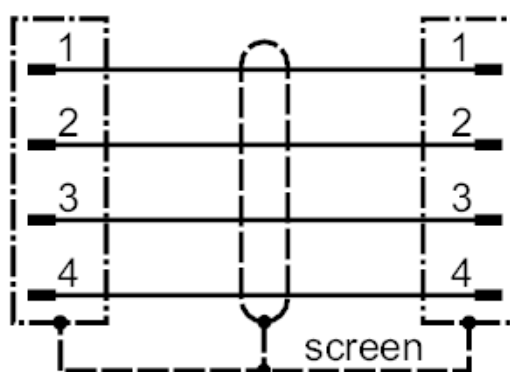

### Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: TPU (urethane); Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: shield connected

