


## Female wirable connectors

SDOGF040MSSFPKG

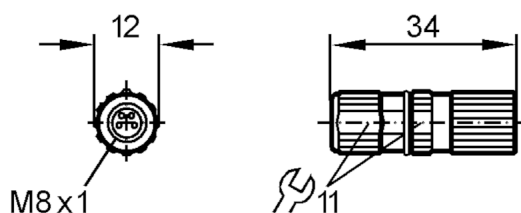

## Application

|        |                      |
|--------|----------------------|
| System | gold-plated contacts |
|--------|----------------------|

## Electrical data

|                         |     |                   |
|-------------------------|-----|-------------------|
| Operating voltage       | [V] | < 45 AC / < 70 DC |
| Protection class        |     | III               |
| Max. current load total | [A] | 4                 |

## Operating conditions

|                     |      |          |
|---------------------|------|----------|
| Ambient temperature | [°C] | -25...90 |
| Protection          |      | IP 68    |

## Mechanical data

|                      |     |                      |
|----------------------|-----|----------------------|
| Weight               | [g] | 17.1                 |
| Material             |     | PA                   |
| Molded-body material |     | PA                   |
| Material nut         |     | brass, nickel-plated |

## Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

## Electrical connection

insulation displacement technology: 0.14...0.38 mm<sup>2</sup>; Core insulation: PVC / TPE; (Ø 1.0...1.6 mm); Cable sheath: Ø 3...5 mm

## Electrical connection - Socket


Connector: 1 x M8, straight; Moulded body: PA; Locking: brass, nickel-plated; Contacts: gold-plated

# E11553



## Female wirable connectors

SDOGF040MSSFPKG



### Connection

