



Profibus-PA Series MDC Receptacles

4 Conductor Profibus-PA Series Receptacles, 18AWG



Front Mount Receptacles | PG9 & Metric Threads | 300 Volt, 4 amps | IP67 Rating




# of Poles	Male Faceview	Color Code	Rating	Wire AWG	Threads	Male Receptacles	Female Receptacles
4		1. Blue(-) 2. Orange(+) 3. Shield 4. N/C	300V 4A	18 AWG	PG9	PBDC-4MR-PG9**-SS	PBDC-4FR-PG9**-SS
					M20	PBDC-4MR-M20**-SS	PBDC-4FR-M20**-SS


** Lengths in meters.

Lock Nut and O-Ring are included.

PG9 Threads

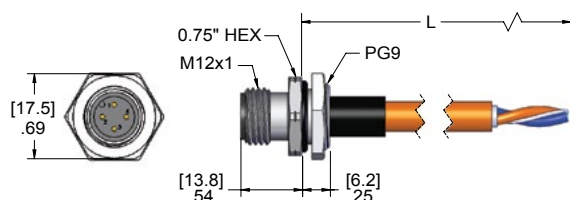


Male Receptacle

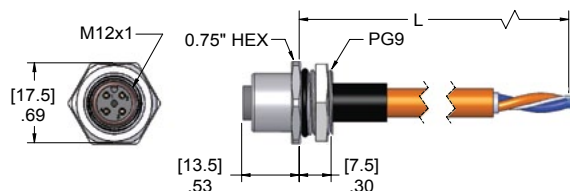


Female Receptacle

M20 Threads

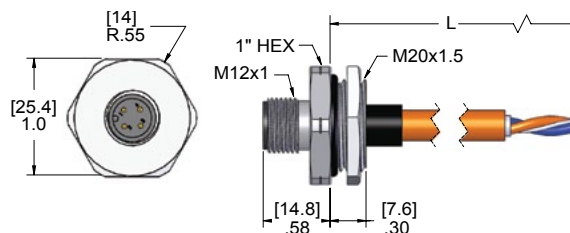

Male Receptacle

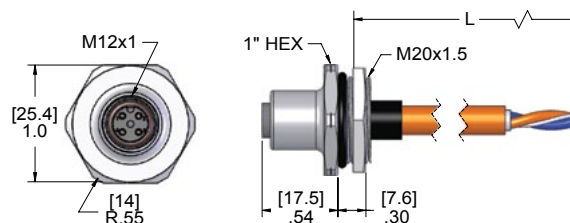

Female Receptacle

Specifications:

Shell:	Stainless Steel
Insulator:	Polyamide
Cable:	Orange PVC, 2x18 AWG Cable with Foil Shield
Contacts:	Copper Alloy with Gold Plating
O-Ring:	NBR
Jam Nut:	Nickel Plated Brass
Temperature:	-40°C to 105°C (-40°F to +221°F)