

T-TYPE / H production lines HYGIENIC SERIES

inserts		page:
CDD	24 poles + ⊕	76
CDS	9 poles + ⊕	-
CDSH	9 poles + ⊕	86
CDSH NC	6 poles + ⊕	95
CNE	6 poles + ⊕	110
CSE	6 poles + ⊕	-
CSH	6 poles + ⊕	110
CSH S	6 poles + ⊕	122
CCE	6 poles + ⊕	130
CSS	6 poles + ⊕	148
CT, CTSE (16A) *)	6 poles + ⊕	160
CQE	10 poles + ⊕	168
MIXO	2 modules	262 - 317

*) only for standard insulating version THIH

housings with single lever HNBR gasket




hoods with single lever, top entry covers, HNBR gasket



description	part No.	entry M	part No.	part No. (with loop)
bulkhead mounting housing with thermoplastic lever	THIH 06 L			
surface mounting housing, thermoplastic lever, high construction	TAPH 06 L25	25		
surface mounting housing, thermoplastic lever, high construction	TAPH 06 L32	32		
with thermoplastic lever and gasket, high construction			TAVH 06 LG25	25
with thermoplastic lever and gasket, high construction			TAVH 06 LG32	32
cover with thermoplastic lever and gasket				THCH 06 LG

panel cut-out for bulkhead mounting housings



TMAO
Hoods
(page 480)




TMAV
Hoods
(page 480)


TCHC
TCHC S
Covers
with eyelet
(page 481)



THIH L




TAPH L

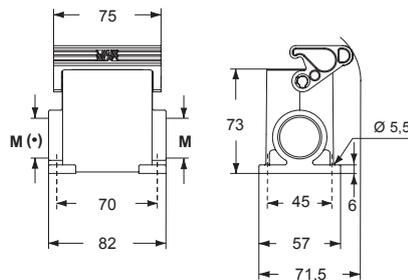


(*) The surface mounting, high construction housings are supplied with an open threaded entry (*) and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).


TAVH LG



THCH LG



For fixing on hoods



CE **RU** **US** Type 12



ambient temperature limits -40 °C / +70 °C